

开箱、封箱、袖口热收缩、打包线


Carton erector, carton sealer, shrink wrapping machine and strapping machine line

该条包装线由开箱机、折盖封箱机、提升旋转机、袖口包装机、打包机及输送机组合而成。主要实现对纸箱的开箱、封箱、袖口热收缩包裹以及打包包装。该条线可实现无人化操作。自动开箱机实现纸箱的自动供给，折盖封箱机自动对纸箱的上下口进行胶带封箱。自动的套膜收缩工序可以对纸箱起到很好的保护作用，避免因无人化打包机对纸箱的碰撞而造成损坏。整条线可以实现对纸箱的完美包装。

The automatic packaging line including carton erector, carton sealer, lift & rotate turntable, shrink wrapping machine, strapping machine and conveyor system. Fully automatic operation without any labor. Automatic carton supply by carton erector. Carton sealer is for sealing the upper and bottom of the carton by tape. Packages will be protected well after shrink wrapping machine and strapping machine. The whole line is the best choice for carton packing.



典型工字型胶带封箱系统
Standard H type carton sealing line

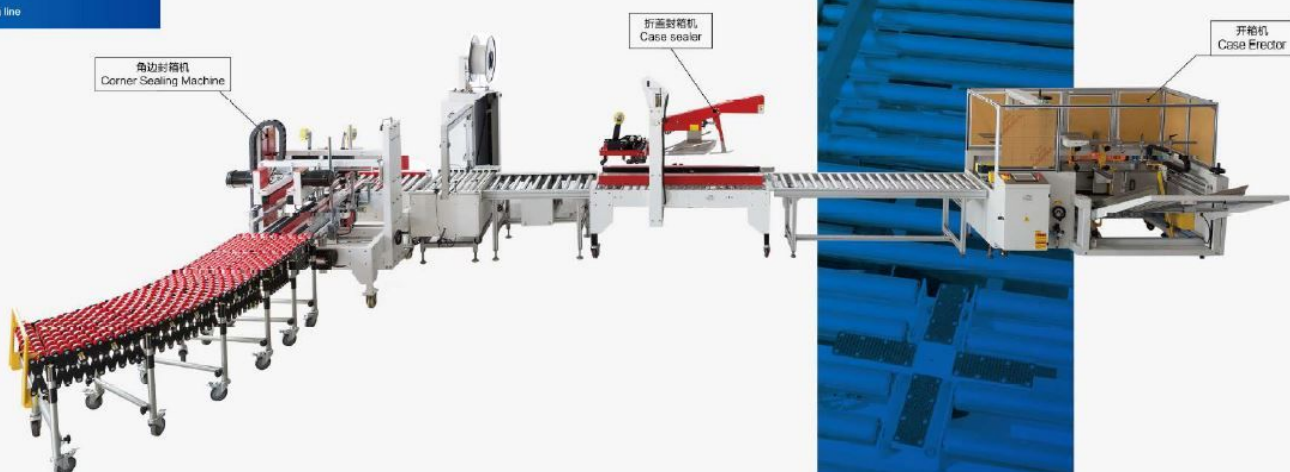



CARTON SEALER SERIES

封箱机系列

YX212L左右驱动胶带封箱机（带编程）

YX212L Side Drive Belt Carton Sealer (with PLC)

型号/Model	YX212L
电源电压/Voltage	380V/50HZ
总功率/Power	200W
输送速度/Conveyor speed	17.5m/min
胶带宽度/Tape width	60-78mm
胶带封头/Adhesive tape head	50-70mm (可调)
封箱长度/Sealing length	300-600mm
封箱宽度/Sealing width	200-500mm
封箱高度/Sealing height	150-400mm
台面高度/Working table height	690-990mm (可调)
机器尺寸/Dimension L*W*H	1700*920*1460
毛重/Gross weight	约140KG

注：封箱机尺寸可根据客户要求定制。
Note: The sealing width and height can be made as customer's request.



组合包装线（YX212L+KX101A）



YX215L自动折盖封箱机（适用重约30kg以下的纸箱）

YX215L Automatic Flap Carton Sealer (Suit for weight: 30kg)

型号/Model	YX215L
电源电压/Voltage	AC110, 220V/60-50HZ
总功率/Power	400W
工作压力/Air pressure	5-6KG/cm ²
输送速度/Conveyor speed	17.5m/min
胶带宽度/Tape width	60-78mm
胶带封头/Adhesive tape head	50-70mm (可调)
封箱长度/Sealing length	200-600mm
封箱宽度/Sealing width	150-500mm
封箱高度/Sealing height	130-500mm
台面高度/Working table height	610-800mm (可调)
机器尺寸/Dimension L*W*H	1800*940*1420
毛重/Gross weight	约250KG

注：封箱机尺寸可根据客户要求定制。
Note: The sealing width and height can be made as customer's request.



组合包装线（YX215L+KX101A）



CARTON SEALER SERIES

封箱机系列