


ANSI 150、800Lb


应用规范 Applied specification

- 1、设计、制造按 Design and manufacture: BS5352
- 2、连接端 Connection ends:
 - 承接口尺寸按 Socket dimensions: ANSI B16.11
 - 螺纹端按 Threaded ends in accordance with: ANSI B2.1
- 3、阀门检查和试验按 Inspection and test: API STD 598

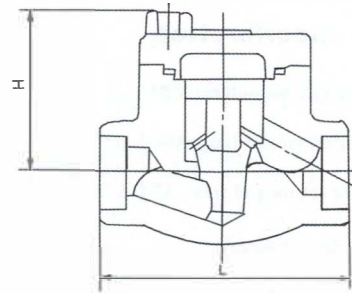

结构Structure: B. B; OS&Y-N

主体材料Body material: 304、316、304L、316L



尺寸和重量 Dimensions and weight

mm

规格Specification		150~800Lb			
DN	inch	L	d1	≈H	重量(kg) Weight
15	1/2	82	NPT1/2	55	2.2
20	3/4	88	NPT3/4	62	2.4
25	1	101	NPT1	69	4.4
40	1 1/2	146	NPT1 1/2	80	7.2
50	2	178	NPT2	106	11.5

订货号Order number

主体材料 Body material	内件代号 Trims code						
	11	22	21	44	82	88	55
304		P8W22P			P8W82P	P8W88P	P8W55P
316		P8W22R			P8W82R	P8W88R	P8W55R
304L		P8W22S			P8W82S	P8W88S	P8W55S
316L		P8W22L			P8W82L	P8W88L	P8W55L

- 说明: 1. 如连接端为螺纹连接, 连接单元“W”用“C”表示。
 2. 如进口端为螺纹, 出口端为承插焊连接单元用“U”表示。
 Note: 1. if the coupler is screwed, the coupler is denoted by "W", "C".
 2. if inlet is screwed, outlet is socket welded, the coupler is denoted by "U".

