



DOUGH EXTRUDER CUTTING & PACKING MACHINE

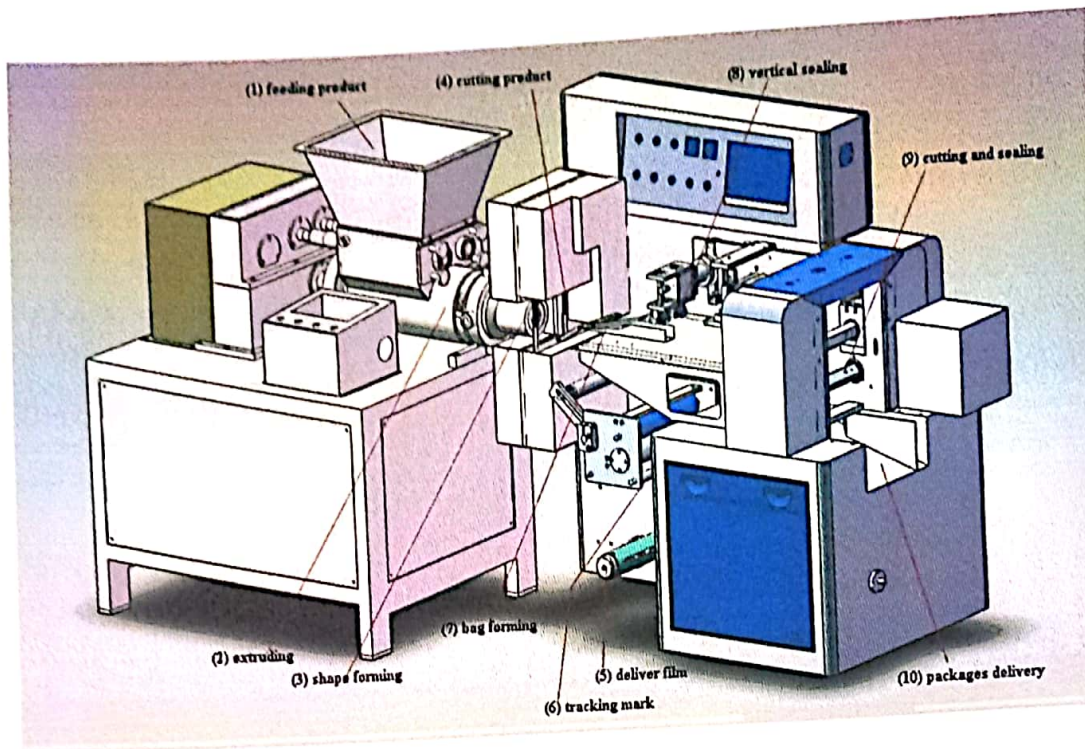


FULLY AUTOMATIC HIGH SPEED VERY HIGH VISCOSE DOUGH CLAY EXTRUDER MACHINE FONDANT PACKAGING MACHINE

PRODUCT APPLICATIONS

The machine suitable to pack Modeling Clay, High Viscose Epoxy dough, Plasticine, Sugar paste, Candy mud, Child mud, Super light clay, Crystal mud, Snuff, Energy bar, Tamarind fruit, Fire mud, Slime, Self hardening sculpture modeling clay, Magnetic plasticine, Terra-cotta plasticine clay and other safe material product.

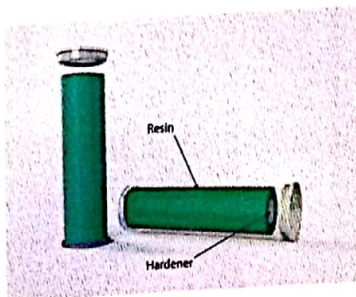

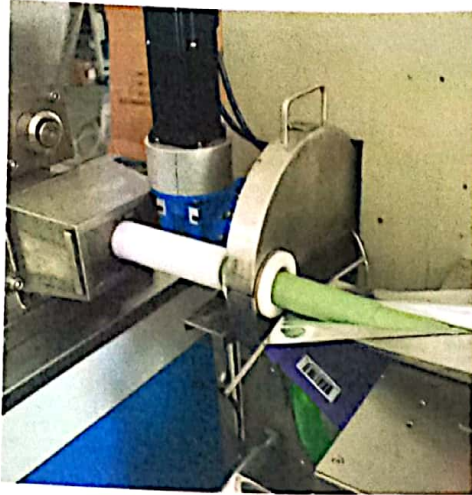

Double row gear reducer

- A. Increase life and stability
- B. Fully sealed gearbox
- C. Simple and functional compact design, eliminating redundant positions

Double screw

- A. Increase extrusion capacity, high efficiency
- B. Increase stability and ensure product quality
- C. Suitable for multiple products



304 Squeezer

- A. 304 integrated welding
- B. Can strong acid & alkaline product
- C. Machine table supports raw materials and assists production



304 extrusion hopper Double-row gear sealed gearbox 304 double screw 304 extruder

PRODUCT ADVANTAGE

* Full automatic soft materials production line with extruding and packing functions,

Fast speed for cutting and packing.

* 2 touch screens (for extruder & packing machine) to make two machine can work separately or together.

* Contact parts use food grade SUS304 stainless steel, save and clean.

* Reduce manual operation and avoid touching products, no pollution and deformation.

* Accurate length cutting, high gram precision.

* Machine with stable performance, easy operation.

* Independent PID temperature control, good for different packing film sealing.

* With auto alarm function, any alarm will show on touch screen.

PRODUCT PARAMETERS

Model	BS-350XL
Package cut length	65-200mm
Product width	max.165mm
Product height	max.60mm
Film thickness	40-80μm
Packaging material width	max.350mm
Film weight	max. 25KG
Packing material	OPP/ CPP, OPP/CE, PET/PE etc.
power supply	380V,50HZ
Power usage	5.5kw-7kw
Type of sealing	Pillow bag
Cutter type	Rotary cutter
Motor configuration	Dual frequency
Machine weight	1000kg
Machine dimensions	L2250XW1000XH1350mm

PACKAGE SAMPLES

