





polymeric sponge filter

Filter Foam - Be made through strip film processing. High porosity, the opening rate can reach 99%, good breathability and high mechanical strength; good flexibility, strong tension, fast dust filtrate speed and high dust filtrate rate, low resistance, chemical function is good. It can be cleaned after washing the effect do not degrade.

Material:	PU polyurethan
Density:	24 KG \ Cubic meter
Size:	2000(L)x1000(W)x3-800(T)MM
Aperture size	10ppi:4~5mm 15ppi:4mm 20ppi:3.5mm 25ppi:3mm 30ppi:2~3mm 35ppi:1~1.5mm 40ppi:0.5~1mm 60ppi:0.1~0.3mm
Application	Refrigerator, Air Conditioner , Cleaner, Fresh air machine , air heater , steam Exhaust air , Aquarium filter, filtering to smooth, filter Mechanical accelerating
Product performance	Dustproof breathable Fireproof Waterproof Resistance to weak acid weak base dustproof breathable
Conventional color	Black white green red yellow blue Color may be designed
Packing	packing woven bag

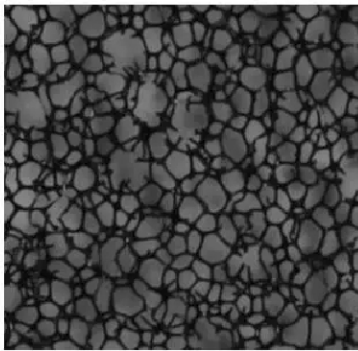


15PPI

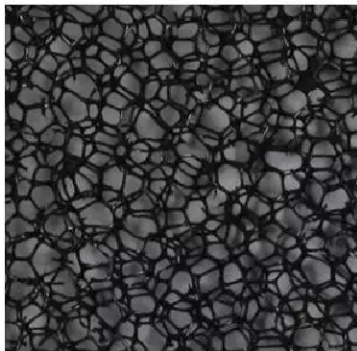

20PPI



25PPI

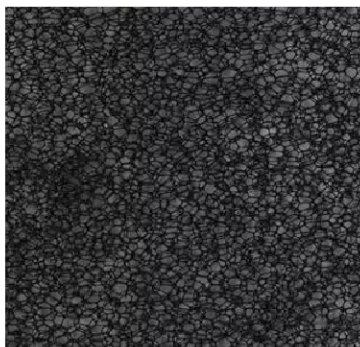

30PPI



35PPI



40PPI