



邵峰机械
SHAOFENG

Back end packing

Introduction

Guangzhou

Shaofeng Mechanical
Device Co.,Ltd

Start in 2005



Auto carton packing machine: SF-ZH001

| | |
|------------------|--|
| Carton weight | 250-350g/m ² (Depend one cartoon size) |
| Cartoon Max size | 200*90*80mm (L*W*H) |
| Cartoon Min size | 55*20*12mm (L*W*H) |
| Speed | 50-90Cartoons/min |
| Size | 3200*1350*1650mm 1000kg |
| Power, air | 380V;50/60HZ 1.5KW 0.6Mpa |
| Auxiliary | Can add instruction book, and auto counting |
| Advantage | <ul style="list-style-type: none"> ☞ PLC controller,easy setting. ☞ Different customer the machine is adjust which is easy install without change any parts ☞ No cartoon no working ,no products no working. ☞ Can be connected by filling and sealing machine to save labor.Can connect auto folding machine. |





| High speed carton packing machine: SF-ZH002 | |
|---|--|
| Carton weight | 250-350g/m ² (Depend one cartoon size) |
| Cartoon Max size | 200*80*70mm (L*W*H) |
| Cartoon Min size | 70*35*14mm (L*W*H) |
| Speed | 150-260Cartoons/min |
| Size | 4500*1600*1800mm 2000kg |
| Power, air | 380V;50/60HZ 6KW 0.6Mpa |
| Auxiliary | 可加放说明书装置, 自动点数装置 |
| Advantage | <ul style="list-style-type: none"> ☞、PLC controller,easy setting. ☞、Different customer the machine is adjust which is easy install without change any parts ☞、No cartoon no working ,no products no working. ☞、Can be connected by filling and sealing machine to save labor.Can connect auto folding machine. |



Pillow packing machine: SF-ZB004

| | | | | |
|---------------|---|--------------------|---------|---------|
| Model | 260/360/450/600 | | | |
| Fill D:mm | 260mm | 360mm | 450mm | 600mm |
| Bag L:mm | 35-190/ 120-180 | 35-190/ 120-180 | 130-450 | 120-500 |
| Bag W:mm | 3-110 | 50-160 | 50-210 | 100-280 |
| Product H:mm | Max40 | Max60 | Max75 | Max110 |
| Size | 4000*920*1450mm | | | |
| Power, air | 380V;50/60HZ 2.8KW 0.6Mpa | | | |
| Other | Inflatable device(Nitrogen, oxygen, air), Exhaust device, aircraft hole, coding | | | |
| Pack material | It can heat seal packaging film materials on one side and two sides (OPP, CPP, OPPPE) | | | |
| Bag shape | Sealed packaging, others need to be customized, reticulated packaging / straight grain packaging, different bag widths need to change the shape | | | |
| Function | <ul style="list-style-type: none"> 👉、伺服电机控制，袋长即设即切，无需调节空走，一步到位，省时省膜。 👉0、全 PLC 触摸屏操作，参数设定方便快捷。 👉1、故障自诊功能，温度独立控制，方便不同的包装材质温度的调节。 👉2、定位停机功能，不粘刀，不浪费包装材料。 | | | |





High speed pillow packing machine: SF-ZB005

| | |
|------------------|---|
| Pack size mm | L60-260mm*W60-190mm*H30-95mm |
| Speed | 30-120bpm |
| Roll diameter mm | 3inch |
| Size | Feeder:3050*500*900mm, Main machine: 2700*1000*1680mm, Shrinking tunnel: 2400*710*1400mm |
| Power, air | 380V;50/60HZ Main machine 5.5KW Heating 15KW |
| Weight | 800KG |
| Pack material | POF, PE PVC, PP |
| Advantage | <ul style="list-style-type: none"> ☞3、 The equipment has a wide range of applications, and is suitable for the packaging of different goods in different industries. ☞4、 PLC operate,store parameters. ☞5、 Far infrared direct heating,fast speed. ☞6、 Temperature high ,machine stop heating to save electric. |



Automatic shrinking machine: SF-L002

| | | | | |
|---------------|---|-----------------|-----------------|-----------------|
| Model | 450/550/650/750/950/1050 | | | |
| Product W:mm | ≤400mm | ≤500mm | ≤600mm | ≤700mm |
| Product L :mm | ≤200mm | ≤200mm | ≤200mm | ≤200mm |
| Sealing :mm | (W+H) ≤450mm | (W+H) ≤550mm | (W+H) ≤650mm | (W+H) ≤750mm |
| Speed | 15-30 包/min | | | |
| Size | Mainly: L1650-2710*W800-1680*H1460mm Tunnel: L1650*W880*H1450mm Shrinking size : 1300*450*220mm | | | |
| Power, air | Mainly 220V;50/60HZ 2KW 0.6Mpa Shrinking tunnel 380V;50/60HZ 10KW | | | |
| Weight | Mainly 300-550KG Tunnel: 280KG | | | |
| Packing | POF. PE | | | |
| Advantage | <ul style="list-style-type: none"> ☞ Imported advanced electrical components, safety protection and alarm devices to ensure the stability. ☞ Side seal design, length is unlimited.sealing height adjustable ☞ SUS heating pipe,two way heating ,with uniform and constant heat. | | | |



Auto shrink wrapping machine: SF-X003

| | |
|----------------|---|
| Model | 6040 |
| Product W:mm | ≤600mm |
| Film thickness | 0.03-0.25mm |
| Sealing mm | L600*W400mm |
| Speed | 0-10 包/min |
| Size | Mainly: L1060*W1600*H1930mm Tunnel: L2500*W820*H1450mm Shrinking size : 1500*500*400mm |
| Power, air | Mainly220V;50/60HZ 3KW 0.6Mpa Shrinking tunnel380V;50/60HZ 23KW |
| Weight | Mainly370KG Shrinking tunnel: 470KG |
| Packing | POF. PE. PP. PVC |
| Advantage | <ul style="list-style-type: none"> ☞ PLC controller ,easy operation. ☞ Suit for Glass bottles, beverages, cans, mineral water, beer ☞ Connected to conveyor,auto count ,auto shrink film,saving labor. ☞ The shrinking machine adopts two high-power air conveying motors to ensure large circulating air volume and uniform temperature in the furnace. And use frequency conversion stepless speed regulation |




Semi auto shrink wrapping machine: SF-X004

| | |
|----------------|---|
| Model | 5038 |
| Product W:mm | ≤500mm |
| Film thickness | 0.03-0.25mm |
| Sealing mm | L450*W270mm |
| Speed | 0-8 包/min |
| Size | Mainly: L1020*W830*H1930mm Tunnel: L2500*W820*H1450mm Shrinking size : 1500*500*400mm |
| Power, air | Mainly220V;50/60HZ 1.8KW 0.6Mpa Shrinking tunnel1380V;50/60HZ 23KW |
| Weight | Mainly300KG Shrinking tunnel: 470KG |
| Packing | POF. PE. PP. PVC |
| Advantage | <ul style="list-style-type: none"> ☞ Button operation,easy operate. ☞ Suit for Glass bottles, beverages, cans, mineral water, beer ☞ Manual put,auto shrink. ☞ The shrinking machine adopts two high-power air conveying motors to ensure large circulating air volume and uniform temperature in the furnace. And use frequency conversion stepless speed regulation |



成型封底

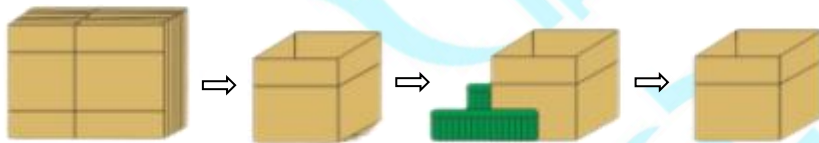

Automatic unpacking machine: SF-KX20

| | | |
|----------------|---|-----------------------------------|
| Carton size mm | 250≤L+W≤550mm 135≤H+W≤400mm | 510≤L+W≤1000mm 300≤H+W/2≤620mm |
| Carton L:mm | 160≤L≤300mm | 280≤L≤500mm |
| Carton W:mm | 90≤W≤200mm | 160≤W≤400mm |
| Carton H:mm | 90≤H≤200mm | 160≤H≤400mm |
| Speed | 8-10 箱/min | |
| Size | L1900(L2050)*W1950*H1450mm 400KG | |
| Power, air | 220V;50/60HZ 1KW 0.6Mpa | |
| Tap suitable | W45mm(<100mm), W60, W75 (choose one) | |
| Packing | <ul style="list-style-type: none"> ☞ Auto unpack,save labor ☞ With line or work alone, suck-forming-fold-sealing one time. ☞ No tap no carton, alarm。Auto carton feeding. ☞ Different type can be adjustable。 ☞ Speed affect by carton size. | |



成型封底



高速自动开箱机：SF-KX30

| | |
|----------------|--|
| Carton size mm | L+W≤900mm 220≤H+W≤600mm |
| Carton L:mm | 280≤L≤500mm |
| Carton W:mm | 160≤W≤400mm |
| Carton H:mm | 130≤H≤400mm |
| Speed | 20-30carton/min |
| Size | L2500*W1450*H1910mm 1000KG |
| Power, air | 220V;50/60HZ 1.5KW 0.6Mpa |
| Tap suitable | W48mm, W60, W75 (Choose) |
| Packing | <ul style="list-style-type: none"> ☞0、Auto unpack,save labor ☞、 With line or work alone, suck-forming-fold-sealing one time. ☞、 No tap no carton, alarm。 Auto carton feeding. ☞0、 Different type can be adjustable。 ☞、 Speed affect by carton size. |



Automatic packing machine: SF-ZX001

| | |
|--------------|--|
| Type mm | Drop / grab / equipped with manipulator |
| Carton L:mm | 200≤L≤500mm |
| Carton W:mm | 150≤W≤400mm |
| Carton H:mm | 100≤H≤400mm |
| Speed | 6-15carton/min |
| Size | L2240*W1900*H3000mm 1000KG |
| Power, air | 220V;50/60HZ 3.5KW 0.6Mpa |
| Tap suitable | Different size customized. |
| Packing | <ul style="list-style-type: none"> ☞、 PLC controller,easy operate. ☞、 Save labor, auto working, can be connected by auto unpack,filling capping machine. ☞、 Different customer and products can be customized ☞、 Change the gripper and fixed block in different quantities. |




封箱順序



Automatic cover folding and sealing machine: SF-308A

| | |
|----------------|--|
| Carton size mm | Min L200*W130*H130mm |
| Carton size mm | Max L600*W500*H500mm |
| Table H :mm | 600-650mm adjustable |
| Weight | 180KG |
| Speed | 20 m/min |
| Size | L1700*W900*H1510mm |
| Power, air | 220V ;50/60HZ 0.4KW 0.6Mpa |
| Tap suitable | W48, W60, W75mm |
| Packing | <ul style="list-style-type: none"> ☞ With line or work alone, ☞ Manual put products inside-auto fold--auto top bottom sealing ☞ Roll diameter 32mm。 |

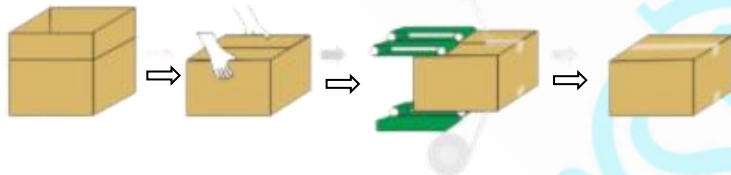


Semi automatic cover folding and sealing machine : SF-305A


| | |
|----------------|--|
| Carton size mm | MIN L150*W180*H130mm |
| Carton size mm | MAX L600*W500*H500mm |
| Table H :mm | 600-650mm adjustable |
| Weight | 126KG |
| Speed | 20m/min |
| Size | L1700*W900*H1510mm |
| Power, air | 220V;50/60HZ 0.2KW 0.6Mpa |
| Tap suitable | W48, W60, W75mm (Choose one) |
| Packing | <ul style="list-style-type: none"> ☞ With line or work alone, ☞ Manual put products inside--auto fold--auto top bottom sealing |




封箱順序

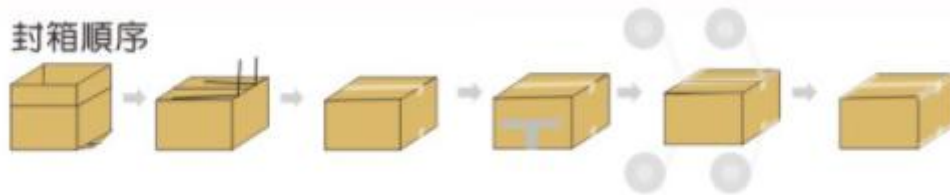

| Auto “工”type carton sealing machine: SF-310A | |
|--|---|
| Carton size mm | Min L340*W200*H180mm |
| Carton size mm | Max L600*W500*H500mm |
| Table H :mm | 600-650mm adjustable |
| Weight | 350KG |
| Speed | 4-5carton/min |
| Size | L1700*W900*H1450mm L2100*W1250*H1500mm |
| Power, air | 220V;50/60HZ 1KW 0.6Mpa |
| Tap suitable | W48, W60, W75mm (Choose one) |
| Packing | <ul style="list-style-type: none"> ☞ With line or work alone, ☞ The machine is composed of a corner sealing box and an upper and lower sealing box. ☞ The use of a single machine requires manual unpacking and packing. ☞ It can be equipped with automatic unpacking machine and automatic packing machine。 |

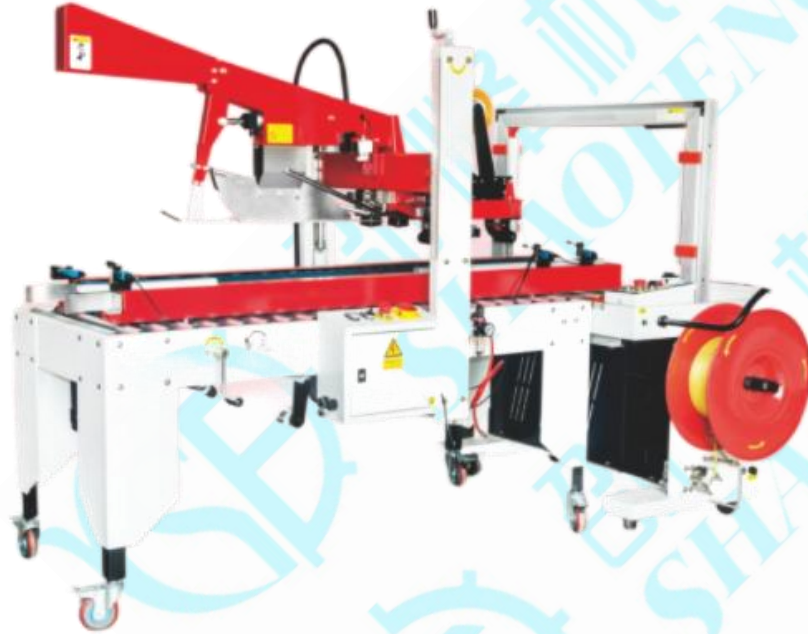

封箱順序

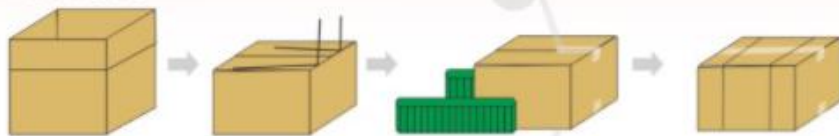

Automatic cover folding and sealing + binding
machine: SF-308B

| | |
|----------------|---|
| Carton size mm | Min L200*W130*H130mm |
| Carton size mm | Max L600*W500*H500mm |
| Table H :mm | 600-650mm adjustable |
| Weight | 280KG |
| Speed | 4-5carton/min |
| Size | L2700*W900*H1510mm |
| Power, air | 220V ;50/60HZ 1KW 0.6Mpa |
| Tap suitable | W48, W60, W75mm (Choose one) |
| Packing | W 9-15mm, Thickness 0.55-0.8mm |
| Packing | <ul style="list-style-type: none"> It has strong adaptability, simple operation, flexible application, and can be used with production lines or single machines. When using a single machine, you need to manually open the carton to form the bottom of the product -- automatically fold the lid -- automatically seal the box up and down. |