

There is a choice of heating system and this can either be by electricity, steam or combined electricity and steam. The **Electric Board** operates under 48 volts.


The machine is delivered **complete** of all the necessary **accessories** for an immediate installation and operative working: chromed smooth plate, felt and rubber sheets, tools for maintenance etc.

Technical specification		TYPES				
		MP 2 MS	MP 3 MS	MP 6 MS	MPT 1200	MP 8 MS
Piston Diameter	mm	375	500	600	700	900
Pressure of Oil in Circuit	atm	300	280	300	300	236
Total Piston Power	t	330	550	850	1200	1500
Platen Dimensions	mm	1370x660	1370x1000	1370x1000	1500x1000	1370x1500
Pressure	Kg/cm <sup>2</sup>	36,5	40	61,9	66,7	73
Space Between Platens	mm	110	120	130	130	140
Complete Working Cycles/Min.	n	12	12	12	12	12
Electric Power Required	CV	15	20	30	45	60

### Specific pressure according to different size of plates

PLATES	MP 2 MS	MP 3 MS	MP 6 MS	MPT 1200	MP 8 MS-T
1370x660	36,5	61	-	-	-
1370x900	-	44,5	68,7	-	-
1370x1000	24,5	40	61,9	73	-
1500x1000	-	36,6	56,5	66,7	100
1500x1370	-	-	41,2	48,6	73



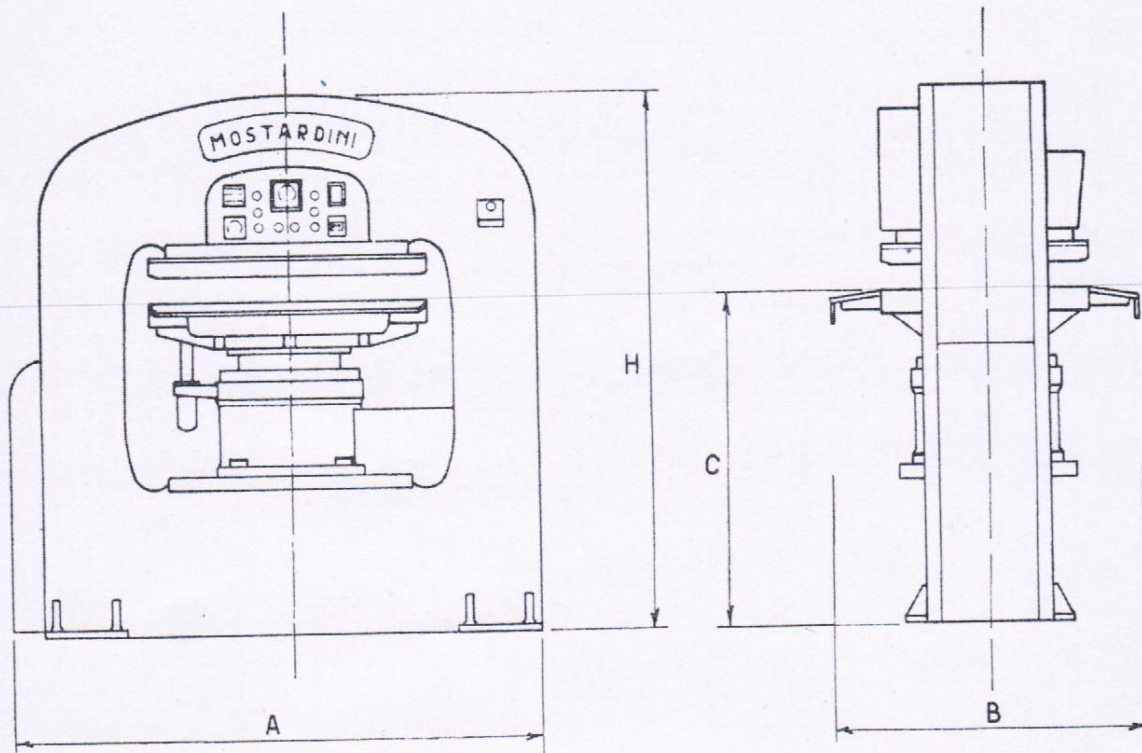

**External sizes**

TYPE	A	B	C	H	P. NET	P. GROSS	VOLUME
	mm.	mm.	mm.	mm.	Kg.	Kg.	m <sup>3</sup>
MP 2 MS - 330 T	2350	1540	1400	2230	7.500	8.300	9
MP 3 MS - 550 T	2550	1540	1605	2580	11.000	11.800	11
MP 6 MS - 850 T	2610	1540	1740	2820	15.000	16.500	13
MP T 1200 T	2900	1540	1800	3000	20.000	21.000	16
MP 8 MS 1500 T	3650	2300	1930	3040	27.000	29.000	19