

## 1.2 Prestazioni

## 1.2 Performances

## 1.2 Leistungen

	ir	n2 X h							n1=1400 rpm h=10000 h		T <sub>max</sub> [Nm]	T <sub>FU</sub> [Nm]
		T <sub>N</sub> [Nm]							T <sub>N</sub> [Nm]	P <sub>i</sub> [kW]		
		10000	20000	50000	100000	500000	1000000	2000000				
EX..1	3.60	3103	2796	2748	2711	2317	1882	1528	1252	52.0	3900	*
	4.25	2794	2601	2557	2523	2283	1855	1506	1297	45.6	3500	
	5.33	2657	2383	2339	2306	2215	1799	1461	1347	37.8	3600	
	6.20	2205	2037	2001	1973	1596	1522	1446	1394	33.6	3100	
	7.50	2029	1880	1741	1539	1200	1145	1091	1096	21.9	2550	
EX..2	12.53	3103	2796	2748	2711	1795	1458	1184	1410	17.2	3900	
	14.79	2794	2601	2557	2523	2017	1638	1330	1665	17.2	3500	
	15.35	3103	2796	2748	2711	1763	1432		1472	14.6	3900	
	18.12	2794	2601	2557	2523	1980	1608		1737	14.6	3500	
	20.77	2961	2669	2100	1986	1712	1391		1565	11.5	3900	
	22.74	2657	2383	2339	2306	2215	1585		2081	14.0	3600	
	24.52	2794	2601	2446	2314	1923	1562		1848	11.5	3500	
	26.43	2205	2037	2001	1973	1596	1522		1590	9.2	3100	
	30.77	2657	2383	2339	2306	2215			2233	11.1	3600	
	35.77	2205	2037	2001	1973	1596			1622	6.9	3100	
	38.40	2649	2371	2057	1906	1596			1653	6.6	3600	
	44.64	2205	2037	2001	1973	1596			1646	5.6	3100	
	54.00	2029	1880	1741	1539	1200			1252	3.5	2550	
EX..3	43.60	3103	2796	2748	2711	1795			2050	7.3	3900	
	51.47	2794	2601	2557	2523	2017			2421	7.3	3500	
	53.41	3103	2796	2748	2711	1795			2179	6.4	3900	
	63.05	2794	2601	2557	2523				2485	6.1	3500	
	72.28	3103	2796	2748	2711				2386	5.1	3900	
	77.24	2794	2601	2557	2523				2495	5.0	3500	
	85.33	2794	2601	2557	2523				2500	4.6	3500	
	104.53	2794	2601	2557	2523				2509	3.7	3500	
	106.49	2794	2601	2557	2523				2510	3.7	3500	
	130.45	2794	2601	2557	2523				2520	3.0	3500	
	141.46	2794	2601	2446	2314				2316	2.6	3500	
	163.71	2657	2383	2339	2306				2314	2.2	3600	
	176.54	2794	2601	2446	2314				2357	2.1	3500	
	190.31	2205	2037	2001	1973				1985	1.6	3100	
	221.54	2657	2383	2339	2306				2328	1.6	3600	
	257.54	2205	2037	2001	1973				1997	1.2	3100	
	276.48	2649	2371	2057	1906				2054	1.16	3600	
	321.41	2205	2037	2001					2006	0.97	3100	
EX..4	219.42	2794	2601	2557					2600	1.89	3500	
	268.80	2794	2601	2557					2600	1.54	3500	
	296.94	2794	2601	2557					2600	1.40	3500	
	329.29	2794	2601	2557					2600	1.26	3500	
	363.76	2794	2601	2557					2600	1.14	3500	
	416.98	3103	2796	2748					2800	1.07	3900	
	453.98	2794	2601	2557					2600	0.91	3500	
	492.27	2794	2601	2557					2600	0.84	3500	
	556.14	2794	2601	2557					2600	0.74	3500	
	614.35	2794	2601						2600	0.67	3500	
	766.71	2794	2601						2600	0.54	3500	
	795.61	3103	2796						2800	0.56	3900	
	939.26	2794	2601						2700	0.46	3500	
	1018.49	2794	2601						2700	0.42	3500	
	1178.68	2649	2371						2600	0.35	3600	
	1271.08	2794	2601						2700	0.34	3500	
	1595.08	2649	2371						2700	0.27	3600	
	1990.66	2649	2371						2700	0.22	3600	

\* Contattare nostro ufficio tecnico commerciale / \* Please, contact our technical sales dept. / \* Bitte setzen Sie sich mit unserer technischen Abteilung in Verbindung


P <sub>TN</sub>	P	R-L-F-FC-FU FB-FCB	M MX	FS FP	T
301	30.0	196.6	23.2	14.4	28.6
302	20.4	14.5	16.5	11.5	19.6
303	12.8	9.3	10.5	7.6	12.3
304	10.3	7.7	8.6	6.4	9.9

1.1 Designazione

1.1 Designation

1.1 Bezeichnung

**EXR 501 708 PD 63.4 PAM100B5 A M11 ID**

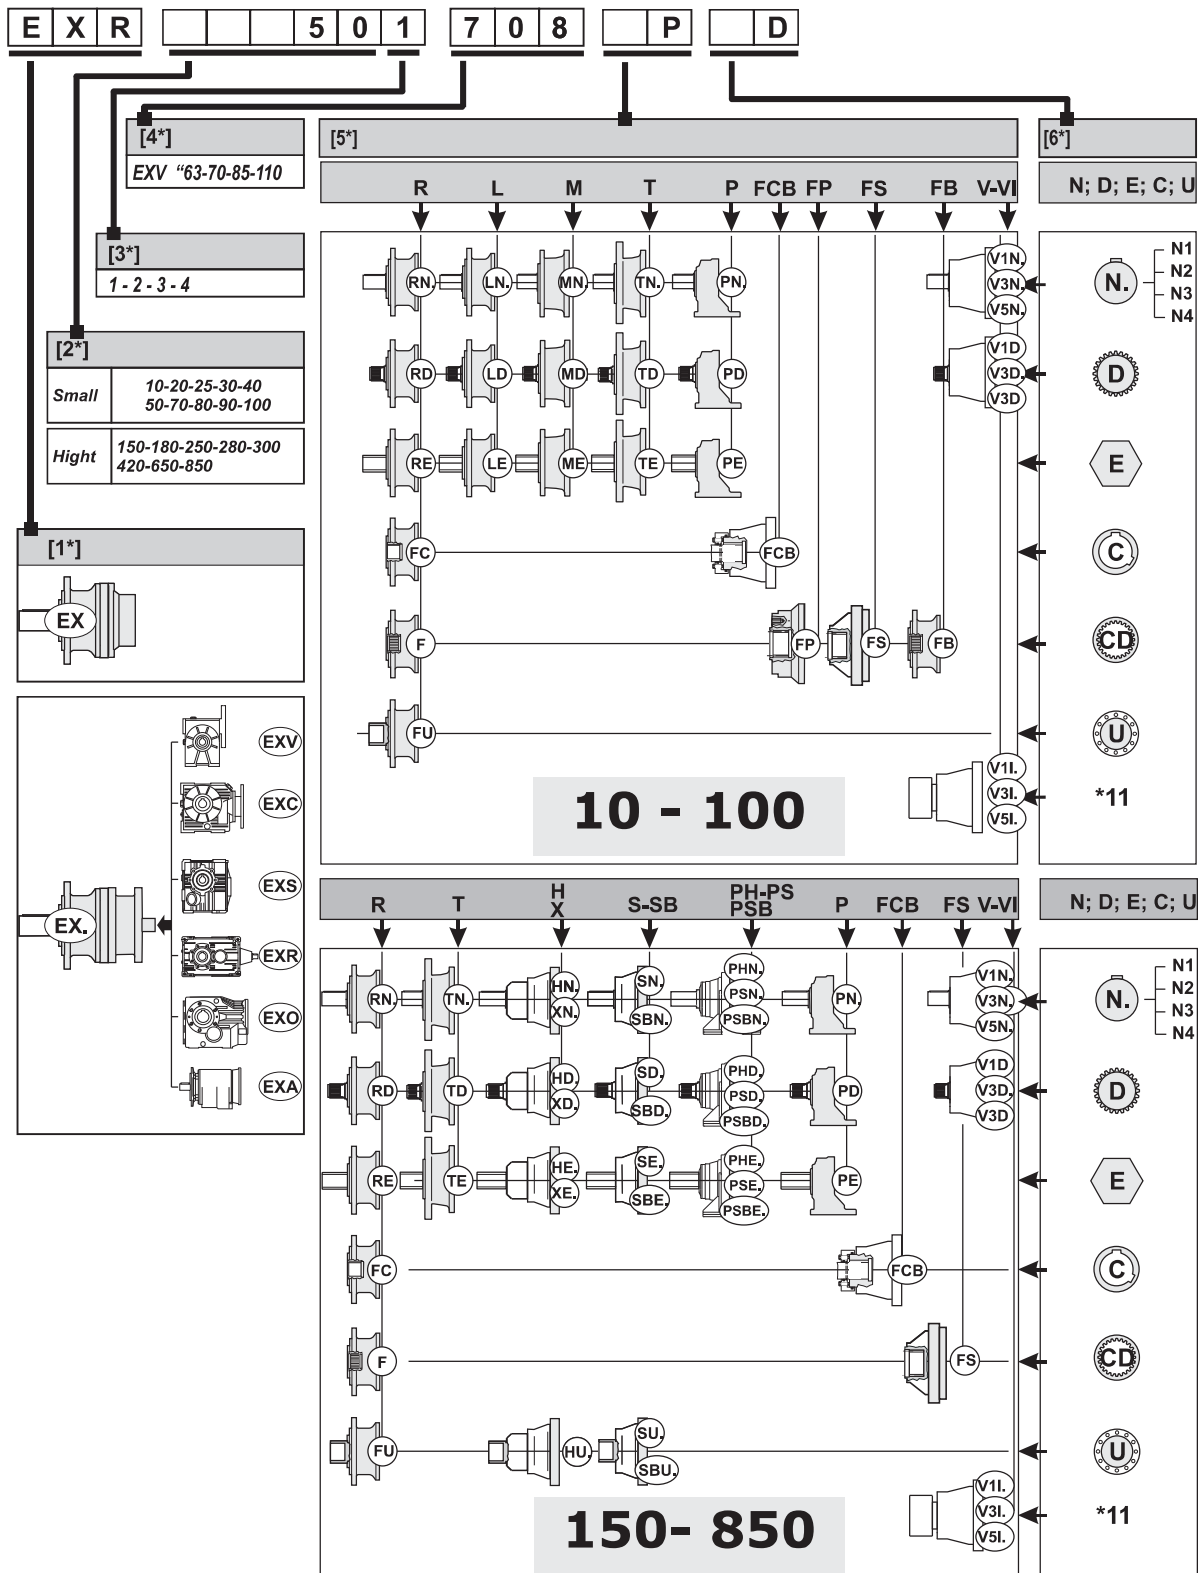

Tipo/Type  
EX201

PN 3

Rapp./Ratio  
1. 4.89

Data/Date  
08.2019

240 Nm

$n_2$  : 297

**S.T.M. BOLOGNA**  
Made in Italy