


- Maximum operating pressure = 5000 psi
- Cannot be adjusted with pressure at Port 1.
- Will accept maximum pressure at Port 2.
- Back pressure on the tank port (port 2) is directly additive at a 1:1 ratio to the valve setting.
- Factory pressure settings established at 4 GPM
- Typical response time 2 ms.
- Maximum leakage = 10 drops/min. at reseal.
- Reseat exceeds 90% of cracking pressure.

**OPTION ORDERING INFORMATION** Model Codes printed in Red are Preferred Versions and most readily available

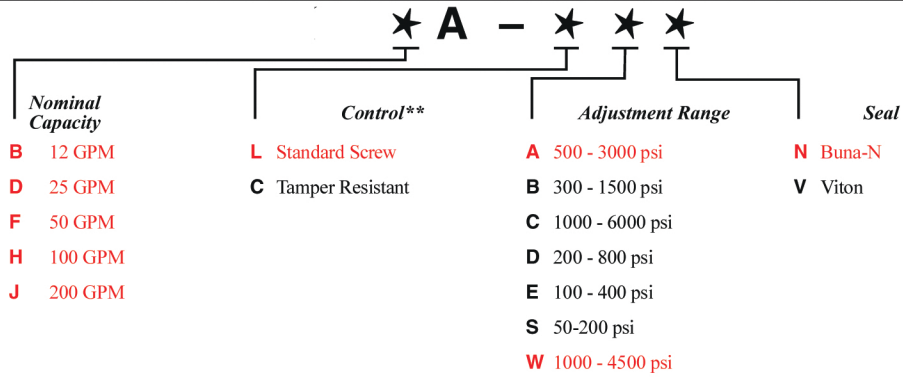

*Adjustment Range Options:*  
 A, B, C, and W are standard set at 1000 psi.  
 D Option is standard set at 400 psi.  
 E Option is standard set at 200 psi.  
 S Option is standard set at 100 psi.  
**Customer may specify pressure setting.**

U.S. Patent #4,742,846      \*\* See page 162 for information on Control Options  
 European Patent Pending