



河北亚沃机械制造有限公司

Hebei Yawo Machinery Manufacturing Co., Ltd

Address: Mukou Village Industrial Zone, Xingjiawan Town, Renxian County, Hebei Province, China

Website: www.yawolathe.com ; Email: david@ywalathe.com ; WhatsApp: +8615227308525

Proforma Invoice

No.: YW20220720

Date: Jul. 20, 2022

To the Buyer: **Mabna Paya Co.**

Address: Iran, Markazi Province, Industrial city Kaveh, 5th Street, No. 20

Tel: 021-88954382; **Contact Person:** Sanaz Abbasi ; **Tel:** +98 912 514 1648

The above Buyer and the undersigned Seller(Manufacturer) have agreed to close the following transaction according to the terms and conditions stipulated bellow:

No.	Description of Goods	Q'ty (SET)	Unit Price (EUR)	Total Price (EUR)	In Total (EUR)
①	Name: Horizontal Lathe Machine Model: CW6163x2000MM (3 jaw chuck instead of 4 jaw)	1	14,800	14,800	88,500
②	Name: Horizontal Lathe Machine Model: CW6180Qx3000MM (3 jaw chuck instead of 4 jaw)	1	17,300	17,300	
③	Name: Horizontal Lathe Machine Model: CW6180Bx4000MM (Add additional 3 jaw chuck, dia. 400mm)	1	21,800	21,800	
④	Name: Horizontal Lathe Machine Model: CW61110Qx5000MM (Add additional 3 jaw chuck, dia. 400mm; Spindle bore make 130mm)	1	26,500	26,500	
⑤	Live center MT6	5	Free as discount	0	
⑥	Shipping cost and insurance	1x40HQ	8,100	8,100	
Total (EUR) CIF BANDAR ABBAS, IRAN: (IN TOTAL: EIGHTY EIGHT THOUSAND AND FIVE HUNDRED EUR ONLY)					88,500.00
Delivery time	40 workdays after receive down payment				
Payment Terms	30% T/T as down payment (=26,550 EUR) ; The balance payment after finish and check before delivery (= 61,950 EUR).				
Warranty	12 months, but life time offer free consult service.				

BENEFICIARY'S ACCOUNT:

Beneficiary Name: HEBEI YAWO MACHINERY MANUFACTURING CO., LTD.

Address: MUKOU VILLAGE, XINGJIAWAN TOWN, RENXIAN COUNTY, XINGTAI CITY, HEBEI PROVINCE, CHINA

Opening Bank: CHINA CONSTRUCTION BANK, HEBEI BRANCH



河北亚沃机械制造有限公司

Hebei Yawo Machinery Manufacturing Co., Ltd

Address: Mukou Village Industrial Zone, Xingjiawan Town, Renxian County, Hebei Province, China

Website: www.yawolathe.com ; Email: david@ywlathe.com ; WhatsApp: +8615227308525

Address: NO. 40 ZIQIANG ROAD, SHIJIAZHUANG, HEBEI, CHINA

Beneficiary's Account Number: 13050 16500 09000 00185

Swift Code of Opening Bank: PCBCCNBJHBX

The Seller (Manufacturer): HEBEI YAWO MACHINERY MANUFACTURING CO., LTD.
(河北亚沃机械制造有限公司)



Note: Specifications of

CW6163x2000mm Horizontal Lathe Machine



Main specification:

MODEL	CW6163x2000MM
Max.swing over bed	630mm
Max. Swing over carriage	350mm
Guide rail width	550mm
Maximum length of workpiece	2000mm
Headstock	
Spindle bore	105mm
Spindle taper	φ 120mm Taper1:20
Spindle speeds	18kinds; 7.5-1000r/min
Gearbox threads & feeds	
Metric threads mm	1-240mm (50 kinds)
Inch threads TPI	14-1 (26 kinds)
Module threads mm	0.5-120mm (53 kinds)
Diametric threads DP	28-1 (24kinds)
Steps and range of longitudinal feeds range	64kinds; 0.05-24.3mm/r
Range 1:1	0.1-1.52r/min
Range 16:1	1.6-24.3mm/r
Cross feed range	0.05-12.15mm/r
Range of micro feed with change gear	0.05-0.912mm/r
Longitudinal and cross feed rate	1/2
Rapid move speed of carriage	4000mm/min
Carriage	



河北亚沃机械制造有限公司

Hebei Yawo Machinery Manufacturing Co., Ltd

Address: Mukou Village Industrial Zone, Xingjiawan Town, Renxian County, Hebei Province, China

Website: www.yawolathe.com ; Email: david@ywalathe.com ; WhatsApp: +8615227308525

Max. Travel of lower slide	500mm
Max. Travel of upper slide	200mm
Tailstock	
Sleeve travel	250mm
Sleeve taper	MT6
Motor	
Main motor power	11kw
Rapid move motor power	1.1kw
Power of coolant pump motor	90w
Standard accessories:	
1.3 jaw chuck instead of 4 jaw	
2.Chuck wrench	
3.Chuck cover	
4.Tool post cover	
5.Tool post wrench	
6.Center	
7.Steady rest	
8.Follow rest	
9.Water box	
10.Leveling iron pads	
11.Foundation bolts	
12. Working light	
13.English Manual book.	



河北亚沃机械制造有限公司

Hebei Yawo Machinery Manufacturing Co., Ltd

Address: Mukou Village Industrial Zone, Xingjiawan Town, Renxian County, Hebei Province, China

Website: www.yawolathe.com ; Email: david@ywalathe.com ; WhatsApp: +8615227308525

Note: *Specifications of*

CW6180Qx3000mm Horizontal Lathe Machine



Main specification:

MODEL	CW6180Qx3000MM
Max.swing over bed	800mm
Max. Swing over carriage	480mm
Guide rail width	550mm
Maximum length of workpiece	3000mm
Headstock	
Spindle bore	105mm
Spindle taper	φ 120mm Taper1:20
Spindle speeds	18kinds; 7.5-1000r/min
Gearbox threads & feeds	
Metric threads mm	1-240mm (50 kinds)
Inch threads TPI	14-1 (26 kinds)



河北亚沃机械制造有限公司

Hebei Yawo Machinery Manufacturing Co., Ltd

Address: Mukou Village Industrial Zone, Xingjiawan Town, Renxian County, Hebei Province, China

Website: www.yawolathe.com ; Email: david@ywlathe.com ; WhatsApp: +8615227308525

Module threads mm	0.5-120mm (53 kinds)
Diametric threads DP	28-1 (24kinds)
Steps and range of longitudinal feeds range	64kinds; 0.05-24.3mm/r
Range 1:1	0.1-1.52r/min
Range 16:1	1.6-24.3mm/r
Cross feed range	0.05-12.15mm/r
Range of micro feed with change gear	0.05-0.912mm/r
Longitudinal and cross feed rate	1/2
Rapid move speed of carriage	4000mm/min
Carriage	
Max. Travel of lower slide	500mm
Max. Travel of upper sllide	200mm
Tailstock	
Sleeve travel	250mm
Sleeve taper	MT6
Motor	
Main motor power	11kw
Rapid move motor power	1.1kw
Power of coolant pump motor	90w
Standard accessories:	
1.3 jaw chuck instead of 4 jaw	
2.Chuck wrench	
3.Chuck cover	
4.Tool post cover	
5.Tool post wrench	
6.Center	
7.Steady rest	
8.Follow rest	
9.Water box	
10.Leveling iron pads	
11.Foundation bolts	
12. Working light	
13.English Manual book.	

Note: *Specifications of*

CW6180Bx4000mm Horizontal Lathe Machine



Items	Unit	CW6180Bx4000mm
Swing over bed	mm	Φ800
Swing over carriage/cross slide	mm	Φ480
Max. Length of workpiece	mm	4000
Spindle bore	mm	105
Taper spindle hole front cone and top	mm	φ120 , MT5
Spindle speed and range	r/min	5.4-720; 18kinds
Longitudinal feed quantities steps and range	mm/r	64kinds; 0.05-24.3
Range1: 1	mm/r	0.1-1.52
Range16: 1	mm/r	1.6-24.3
Trace feed range through using gear change	mm/r	0.06-0.76
The ratio of transverse/longitudinal feeding		1:2
Rapid move speed of saddle	mm/min	4000
Machine screw pitch	mm	12(Metric) 1/2" (inch)
Metric thread species, scope	mm	50kinds, 1-240 (With 14 kinds of non-standard thread)
Inch thread species, scope		26kinds; 14-1 t.p.i
Module thread species, range	mm	53kinds; 0.5-120
Diametral pitch screw species, scope		24kinds; 28-1 DP
Cross travel of lower knife rest	mm	500
Cross travel of upper knife rest	mm	200



河北亚沃机械制造有限公司

Hebei Yawo Machinery Manufacturing Co., Ltd

Address: Mukou Village Industrial Zone, Xingjiawan Town, Renxian County, Hebei Province, China

Website: www.yawolathe.com ; Email: david@ywalathe.com ; WhatsApp: +8615227308525

Sleeve travel	mm	250
Tailstock sleeve taper		MT6
Main motor power	kw	11
Rapid move motor power	kw	1.1
Coolant pump power	w	90
Guide rail width	mm	600
Max. Load capacity	kg	2500

Standard accessories:


1. Four jaws chuck, diameter 630mm
2. Chuck wrench
3. Chuck cover
4. Tool post cover
5. Tool post wrench
6. Center
7. Steady rest
8. Follow rest
9. Water box
10. Leveling iron pads
11. Foundation bolts
12. Working light
13. English Manual book.

Add following optional accessory:

- 3 jaw chuck, dia. 400mm

Note: *Specifications of*

CW61110Qx5000mm Horizontal Lathe Machine

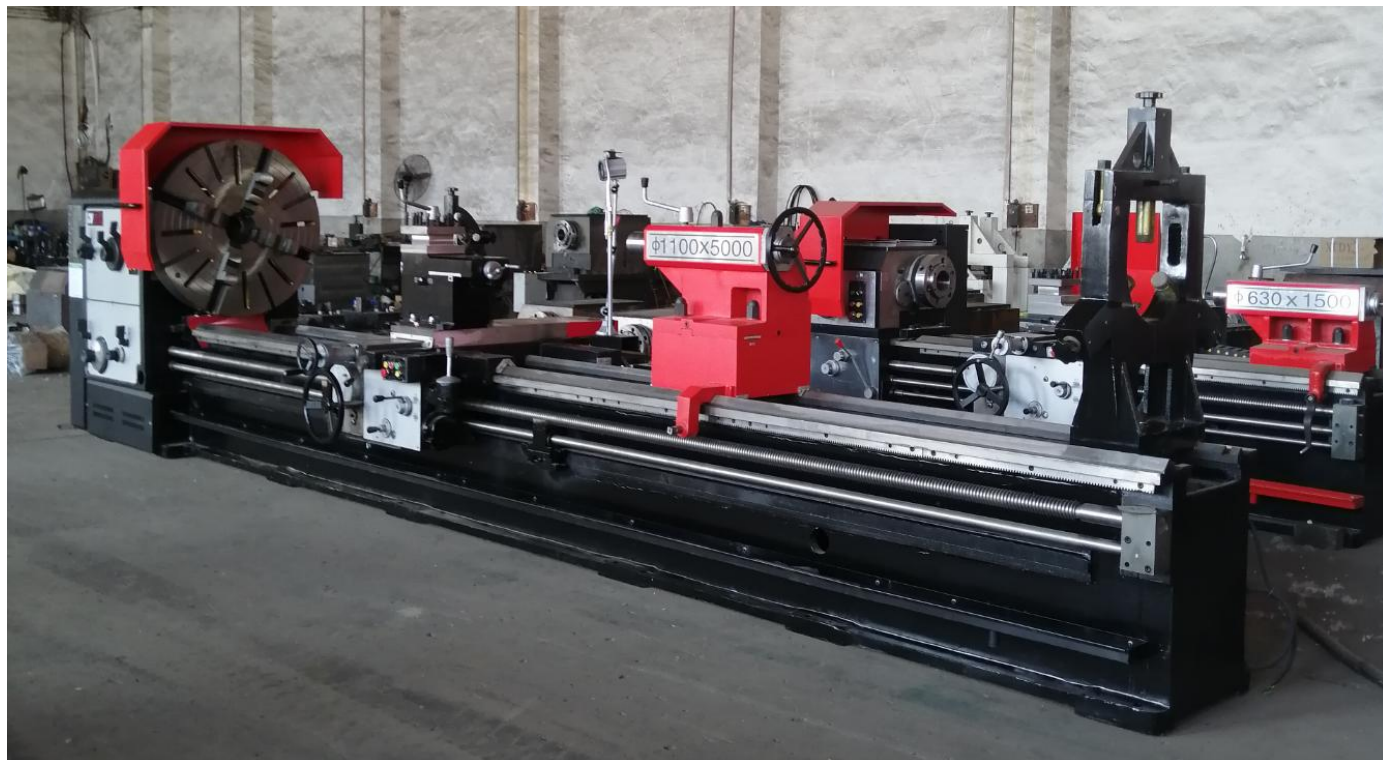

Items	Unit	CW61110Qx5000mm
Swing over bed	mm	Φ1100
Swing over carriage/cross slide	mm	Φ800
Max. Length of workpiece	mm	5000
Spindle bore	mm	130
Taper spindle hole front cone and top	mm	φ120 , MT5
Spindle speed and range	r/min	5.4-720; 18kinds
Longitudinal feed quantities steps and range	mm/r	64kinds; 0.05-24.3
Range1: 1	mm/r	0.1-1.52
Range16: 1	mm/r	1.6-24.3
Trace feed range through using gear change	mm/r	0.06-0.76
The ratio of transverse/longitudinal feeding		1:2
Rapid move speed of saddle	mm/min	4000
Machine screw pitch	mm	12(Metric) 1/2" (inch)
Metric thread species, scope	mm	50kinds, 1-240 (With 14 kinds of non-standard thread)
Inch thread species, scope		26kinds; 14-1 t.p.i
Module thread species, range	mm	53kinds; 0.5-120
Diametral pitch screw species, scope		24kinds; 28-1 DP



河北亚沃机械制造有限公司

Hebei Yawo Machinery Manufacturing Co., Ltd

Address: Mukou Village Industrial Zone, Xingjiawan Town, Renxian County, Hebei Province, China

Website: www.yawolathe.com ; Email: david@ywlathe.com ; WhatsApp: +8615227308525

Cross travel of lower knife rest	mm	500
Cross travel of upper knife rest	mm	200
Sleeve travel	mm	250
Tailstock sleeve taper		MT6
Main motor power	kw	11
Rapid move motor power	kw	1.1
Coolant pump power	w	90
Guide rail width	mm	600
Max. Load capacity	kg	2500

Standard accessories:

1. Four jaws chuck, diameter 800mm
2. Chuck wrench
3. Chuck cover
4. Tool post cover
5. Tool post wrench
6. Center
7. Steady rest
8. Follow rest
9. Water box
10. Leveling iron pads
11. Foundation bolts
12. Working light
13. English Manual book.

Add following optional accessory/Configuration:

1. 3 jaw chuck, dia. 400mm;
2. Spindle bore make 130mm;
3. Live center MT6: 5pcs.