

## NASH SC™

### BASIC SPECIFICATIONS


Vacuum Range to 67 mbar abs  
to 28 in HgV

Pressure Range to 2 bar abs  
to 15 psig

Construction Materials Ductile iron, stainless steel

Available in nine models, the capacities of the NASH SC pumps range from about 100 CFM to 3,200 CFM. Simple to install, and easy to maintain, the NASH SC keeps on performing.

The NASH SC™ can be found in countless applications, including autoclaves, chucking, container filling, labeling and forming, cooking, deaerating, deodorizing food and fats, drying, evaporating, eviscerating, exhausting, extruder venting, fiber setting, filtering, forming, gas stripping, laboratory central vacuum systems, medical and dental vacuum draining, molding, pickup and conveying, priming, slot extraction, and solvent recovery.

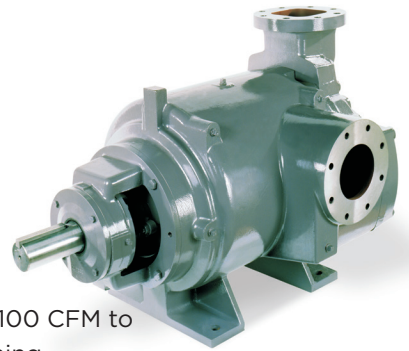

## NASH CL™

### BASIC SPECIFICATIONS

Vacuum Range to 100 mbar abs  
to 27 in HgV

Pressure Range to 2 bar abs  
to 15 psig

Construction Materials Ductile iron, stainless steel  
combination of both materials

The NASH CL™ is perhaps the most popular liquid ring vacuum pump ever built. There are 12 different models, from the CL-200 through the CL-14000, with capacities ranging from 170 CFM to more than 14,000 CFM.

The NASH CL is still found in many applications, including paper machine dewatering, autoclaves, carburetor testing, chucking, condenser air removal, container filling, cooking, deaerating, drying, eviscerating, exhausting, molding, pickup and conveying, priming, slot extraction, and solvent recovery.

Do you want to save water while using your existing CL?

The NASH ECO-FLO™ system can help.

### ECO-FLO™ BENEFITS:

- Reduces water usage by up to 50%
- Inlet and discharge piping are unchanged - no process piping changes
- Uses existing base, motor, and drive
- Potential payback of less than six months
- Overhaul to exacting Nash standards at a Nash CERTIFIED™ Service Center
- Available in both cast iron and stainless steel
- Nash 2-year manufacturing warranty\*