


einsatzgehärtet 62 ± 3 HRC Eht 1.2 ... 1.5  
 casehardened 62 ± 3 HRC Eht 1.2 ... 1.5

(Lochzahl = 2040)  
 (Hole number = 2040)

General tolerances according to Buhler document: UAS - 24200 / Allgemeintoleranzen gemäss Buhler Dokument: UAS - 24200		Machine type		600/228	
Description: roller shell perforated 228		Name	Date		
Walzenmantel gelocht 228		Originator	2015-10-28		
		Release	2015-10-28		
		Document Number	Revision	Scale	Item Number
		LS0000734924	06	1:5	DPHD-10610-010
					06

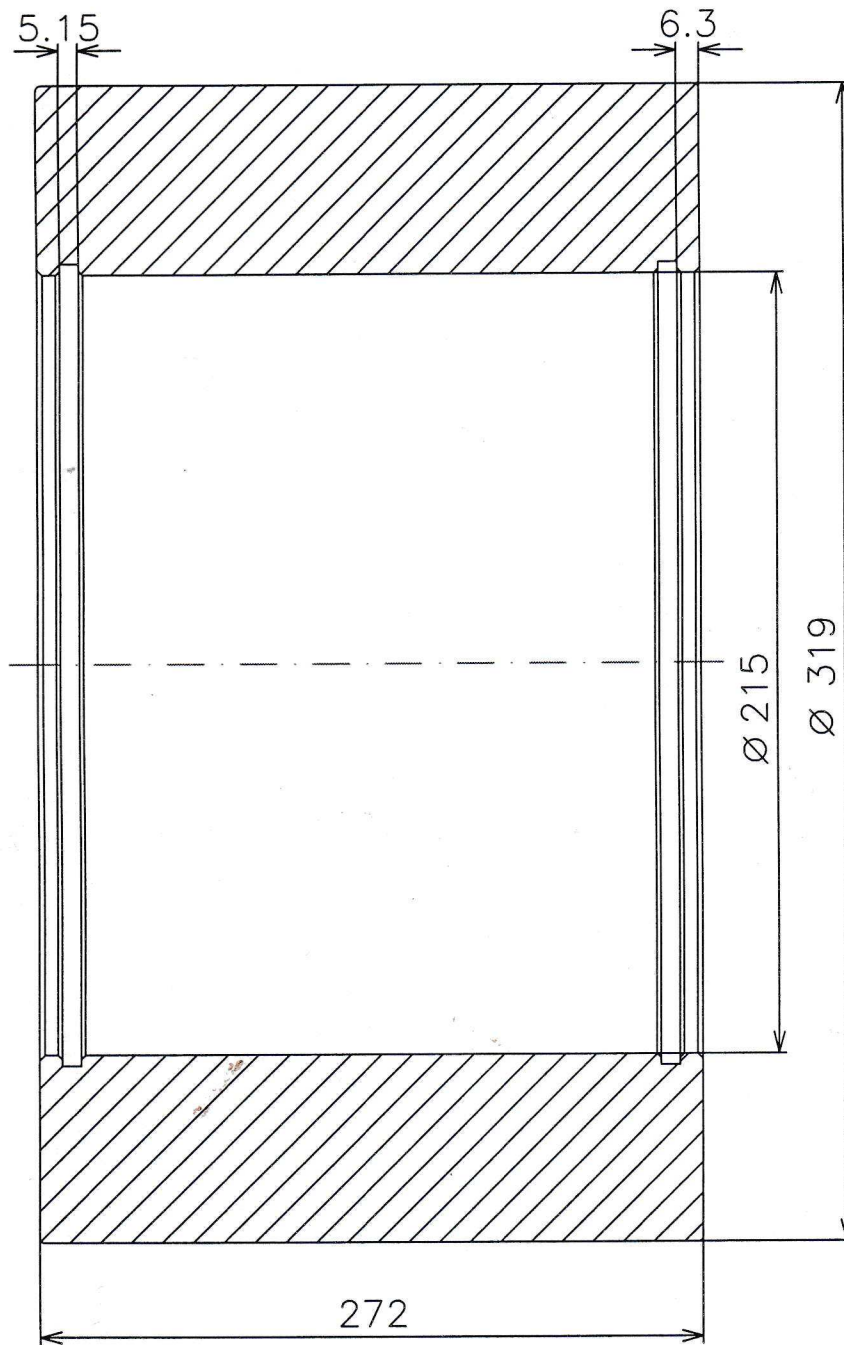

WIJZIGINGEN	D.D.	form. A3	BENAMING:BUHLER 660-265	
				GECON. <i>[Signature]</i>
				GETEK. R.Coenen
			BOXTELNR.	
algemene tolerantie ±0.3		SCHAAL:1:2	DATUM: 21.06.12	DEURNE NR. RV2179
hoektolerantie ± 1°				