


DIMENSIONS

RXE 5000, RXH 5000 Duplex, Rotational Internal Pipe: Thread Connection

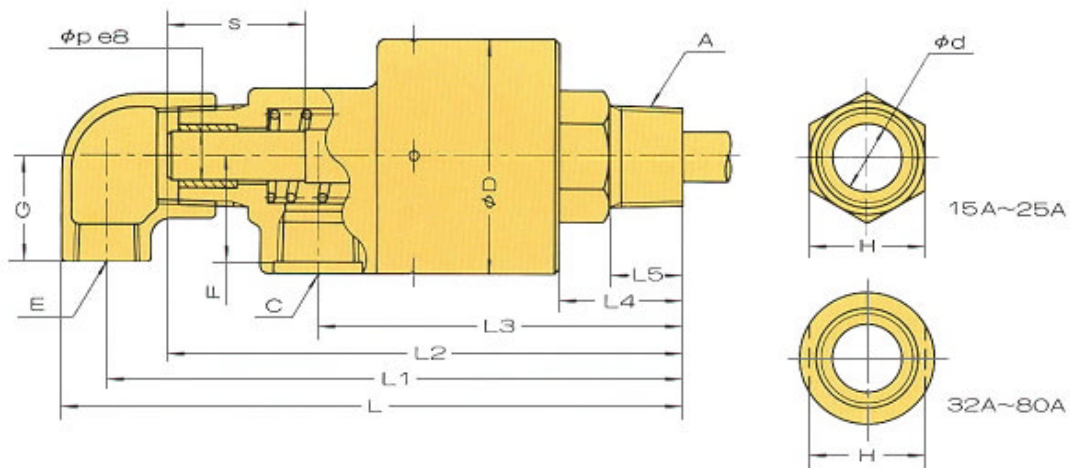

SIZE	CODE	A	C	E	F	G	D	L	L1	L2	L3	L4	L5	d	H		
																p	s
15	5015	R1/2	Rc1/2	Rc3/8	24	25	53	153	141	128	91	28	18	12.5	22	10	30
	5115	G1/2	Rc1/2	Rc3/8	24	25	53	155	143	130	93	30	18	12.5	27	10	30
	5215	M22x1.5	Rc1/2	Rc3/8	24	25	53	155	143	130	93	30	18	12.5	27	10	30
	5615	NPT1/2	NPT1/2	NPT3/8	24	25	53	153	141	128	91	28	18	12.5	22	10	30
	5715	3/4-16UNF	NPT1/2	NPT3/8	24	25	53	155	143	130	93	30	18	12.5	27	10	30
20	5020	R3/4	Rc1/2	Rc3/8	29	28	65	165	153	138	98	32	19	18	32	13	30
	5120	G3/4	Rc1/2	Rc3/8	29	28	65	165	153	138	98	32	17	18	32	13	30
	5220	M26x1.5	Rc1/2	Rc3/8	29	28	65	165	153	138	98	32	17	18	32	13	30
	5620	NPT3/4	NPT1/2	NPT3/8	29	28	65	165	153	138	98	32	19	18	32	13	30
	5720	1-14UNS	NPT1/2	NPT3/8	29	28	65	165	153	138	98	32	17	18	32	13	30
25	5025	R1	Rc3/4	Rc1/2	33	33	72	187	174	157	110	37	22	22	36	16	35
	5125	G1	Rc3/4	Rc1/2	33	33	72	183	170	154	106	33	18	22	36	16	35
	5225	M35x1.5	Rc3/4	Rc1/2	33	33	72	184	171	154	107	34	16	22	41	16	35
	5625	NPT1	NPT3/4	NPT1/2	33	33	72	187	174	157	110	37	22	22	36	16	35
	5725	1 1/2-12UNF	NPT3/4	NPT1/2	33	33	72	191	178	160	114	41	23	22	41	16	35
32	5032	R1 1/4	Rc1	Rc3/4	36	40	83	219	202	182	132	45	25	30	41	20	40
	5132	G1 1/4	Rc1	Rc3/4	36	40	83	220	203	182	133	46	25	30	41	20	40
	5232	M42x1.5	Rc1	Rc3/4	36	40	83	220	203	182	133	46	25	30	41	20	40
	5632	NPT1 1/4	NPT1	NPT3/4	36	40	83	219	202	182	132	45	25	30	41	20	40
	5732	1 3/4-12UN	NPT1	NPT3/4	36	40	83	220	203	182	133	46	25	30	41	20	40
40	5040	R1 1/2	Rc1	Rc3/4	39	43	89	226	209	189	137	47	25	35	46	26	40
	5140	G1 1/2	Rc1	Rc3/4	39	43	89	227	210	189	138	48	25	35	46	26	40
	5240	M50x1.5	Rc1	Rc3/4	39	43	89	227	210	189	138	48	25	35	46	26	40
	5640	NPT1 1/2	NPT1	NPT3/4	39	43	89	226	209	189	137	47	25	35	46	26	40
	5740	2-12UN	NPT1	NPT3/4	39	43	89	227	210	189	138	48	25	35	46	26	40
50	5050	R2	Rc1 1/2	Rc1	50	51	115	268	247	224	164	56	30	48	60	32	45
	5650	NPT2	NPT1 1/2	NPT1	50	51	115	268	247	224	164	56	30	48	60	32	45
65	5065	R2 1/2	Rc2	Rc1 1/2	68	62	123	345	315	283	206	75	40	58	65	40	55
	5665	NPT2 1/2	NPT2	NPT1 1/2	68	62	123	345	315	283	206	75	40	58	65	40	55
80	5080	R3	Rc2	Rc1 1/2	72	62	138	353	323	290	212	75	40	68	75	48	60
	5680	NPT3	NPT2	NPT1 1/2	72	62	138	353	323	290	212	75	40	68	75	48	60

A rotor with a parallel screw is supplied with the copper plate gasket.

Please prepare the internal pipe by yourself. If you should place an order for the internal pipe with us, please be sure to specify the dimensions.

RXC & RXM are the same as RXE & RXH respectively but Casing and Elbow (connection for hose) threads are NPT.

RXC: Suitable for cooling service. Lubrication free due to pre-greased ball bearings

RXM: Available for high temperature and high speed operation with high grade seal materials and providing grease nipple for lubrication

Code No.56**&57** are not available for RXC & RXM.