



Thermostatic 3 way valve - Self actuated internal sensing

Type B

FEATURES :

- Flow rate – 10 to 450 m³/hr
- Body Materials – Combinations available in Steel, Bronze, Cast Iron and Aluminium.
- Completely self-contained.
- Positive 3-way valve action.





KEY BENEFITS:



- No external power source required, simple low cost installation.
- No user setting needed.
- Fewer parts, simple maintenance and low cost of ownership.

Typical picture above
2" BFCB – 130 – 01 -00 - AA

Diverting applications

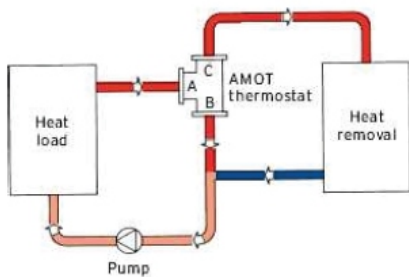

Mixing applications

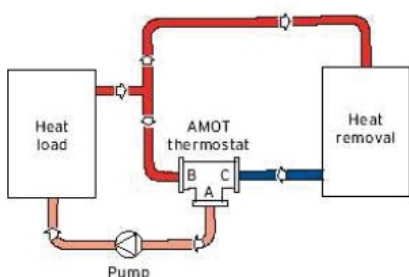

Thermostatic 3 way valve - Self actuated internal sensing

Dimension/ Connection (mm)	1½ B0	2B0/ BH/BG	2BF	2BC/ BR	2½B0/ BR	3B0/ BR	33B0/ BR	4B0/ BR	5B0/ BR	6B0/ BR	8B0/ BR
NB	40	50	50	50	65	80	80	100	125	150	200
F	246	246	270	225	254	267	267	403	489	489	840
H	91	91	113	149	165	171	171	217	241	254	280
J	97	97	121	-	-	-	-	-	-	-	-
D	-	-	165	165	185	200	200	224	254	285	340
W	140	139	139	140	210	210	245	308	349	483	485
t	-	-	20	20	20	22	22	24	26	26	30
K	PN10/16	-	125	125	145	160	160	180	210	240	295
	125/150LB	-	120.6	120.6	139.7	152.6	152.6	190.5	216	240	299
d	PN10/16	-	18	18	18	18	18	18	18	23	22
	125/150LB	-	19	19	19	19	19	19	22.2	23	22
n	PN10/16	-	4	4	4	8	8	8	8	8	8 or 12*
	125/150LB	-	4	4	4	4	4	8	8	8	8

2BC, 2BM and 2½ - 6B0/BR

