


# Trelleborg Materials Handling Hose

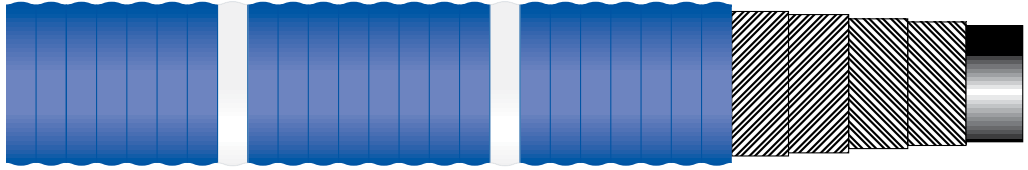

## T806-100\* Standard - Delivery\*


<b>Application</b>	For the delivery of abrasive slurry materials particularly in mining operations.
<b>Tube</b>	Natural Rubber - Super Abrasion Resistant (S.A.R.).
<b>Reinforcement</b>	High Tensile Synthetic.
<b>Cover</b>	Blue, Natural Rubber, Super Abrasion Resistant (S.A.R.) - White Circumferential Stripe.
<b>Length</b>	Up to 10 metres.
<b>Couplings</b>	Swivel, Fixed, Inbuilt.

\*May be subject to special manufacture.

\*Various tube thicknesses are available upon request.



Nominal Bore (mm)	Working Pressure (MPa)	Outside Diameter (mm)	Mass (Kg/m)
50	0.7	69.2	2.2
75	0.7	95.6	3.4
100	0.7	121.0	4.3
125	0.7	146.4	5.0
150	0.7	171.8	6.0
200	0.7	227.0	10.5
250	0.7	278.0	11.2
300	0.7	328.6	14.4
350	0.7	379.4	16.7
400	0.7	434.8	21.1
450	0.7	485.4	25.6
500	0.7	536.2	28.3

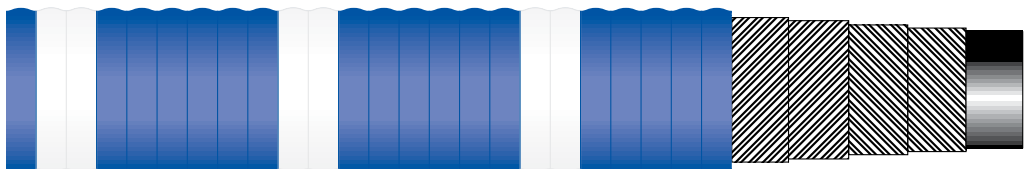

## T806-150\* Standard - Delivery\*

<b>Application</b>	For the delivery of abrasive slurry materials particularly in mining applications.
<b>Tube</b>	Natural Rubber - Super Abrasion Resistant (S.A.R.).
<b>Reinforcement</b>	High Tensile Synthetic.
<b>Cover</b>	Blue, Natural Rubber, Super Abrasion Resistant (S.A.R.) - Wide White Circumferential Stripe.
<b>Length</b>	Up to 10 metres.
<b>Couplings</b>	Swivel, Fixed, Inbuilt.

\*May be subject to special manufacture.

\*Various tube thicknesses are available upon request.

Nominal Bore (mm)	Working Pressure (MPa)	Outside Diameter (mm)	Mass (Kg/m)
50	1.0	70.2	2.1
75	1.0	95.6	3.2
100	1.0	121.0	4.1
125	1.0	150.8	6.8
150	1.0	176.4	7.0
200	1.0	227.0	9.8
250	1.0	282.4	13.4
300	1.0	333.0	17.6
350	1.0	383.8	20.3
400	1.0	439.0	26.9
450	1.0	489.8	30.0