



*Optimal Solutions for the Future*

# T 4000 series



---

**High-Speed,  
High-Productivity  
Tapping Center**

---

**T 4000 series**

T 4000

T 4000L

---

ver. EN 160502 SU

**Basic information**

Basic Structure  
Cutting  
Performance

**Detailed Information**

Standard/Optional Specifications  
Applications  
Diagrams  
Machine & NC Unit Specifications

**Customer Support Service**



# T 4000 series

Doosan's T Series is a high-speed tapping center that delivers excellent vastly and productivity. The T Series offers even faster acceleration and greater responsiveness, as well as a greatly improved Z axis for increased productivity. Various accessories and peripheral devices are provided as standard feature, creating added value for users.



## Contents

### 02 Product Preview

#### Basic Information

04 Basic Structure

09 Cutting Performance

#### Detailed Information

10 Standard/Optional Specifications

12 Applications

13 Diagrams

15 Machine & NC Unit Specifications

18 Customer Support

Sample



### High Reliability, Free Of Defects

The new servo-driven T Series, equipped with 21 tools as a standard, offers the highest level of reliability due to improved acceleration and deceleration performance resulting from the optimized spindle length.

### NC System with Wide Range of Specifications for Excellent Performance

Fanuc NC eliminate idle time and maximize system productivity.

### Enhanced Stability and User Convenience

User convenience has been improved by reducing the machine and table heights and optimizing the center of gravity.

Basic information

Basic Structure  
Cutting  
Performance

Detailed Information

Standard/Optional Specifications  
Applications  
Diagrams  
Machine & NC Unit Specifications

Customer Support Service



### Basic Structure

Doosan's new tapping center offers improved quality and increased productivity.

### High-speed, High-productivity Tapping Center

The new tapping center delivers best in class productivity by providing superior machining capabilities, a higher feed rate, and a faster tool change time when machining components for the Automotive and IT industries.



Spindle speed **12000 / 24000 r/min**

Automatic Tool Changer **21 ea (Servo)**


Diversified NC unit specification **FANUC CNC**

| Description                 | Unit      | T 4000                                  | T 4000L                                 |
|-----------------------------|-----------|---|---|
| Travel distance (X / Y / Z) | mm (inch) | 520 / 400 / 350<br>(20.5 / 15.7 / 13.8) | 700 / 400 / 350<br>(27.6 / 15.7 / 13.8) |
| Table size                  | mm (inch) | 650x400 (25.6x15.7)                     | 850x400 (33.5x15.7)                     |
| Load capacity               | kg (lb)   | 300 (661.4)                             |   |
| Spindle speed               | r/min     | 12000 (24000)                           |   |
| TSC                         |           | <b>option</b>                           |   |
| No. of tool stations        | ea        | 21                                      |   |
| Rapid traverse              | m/min     | 56                                      | 56*                                     |
| NC specification            |           | DOOSAN FANUC i series                   | DOOSAN FANUC i series<br>FANUC 31i      |

\* 48m/min applies to F-31i NC


### Reliability Enhanced with a High-rigidity Structural Design

Improved structural design and increased rigidity, realized through FEM analysis, guarantees a stable machining platform.

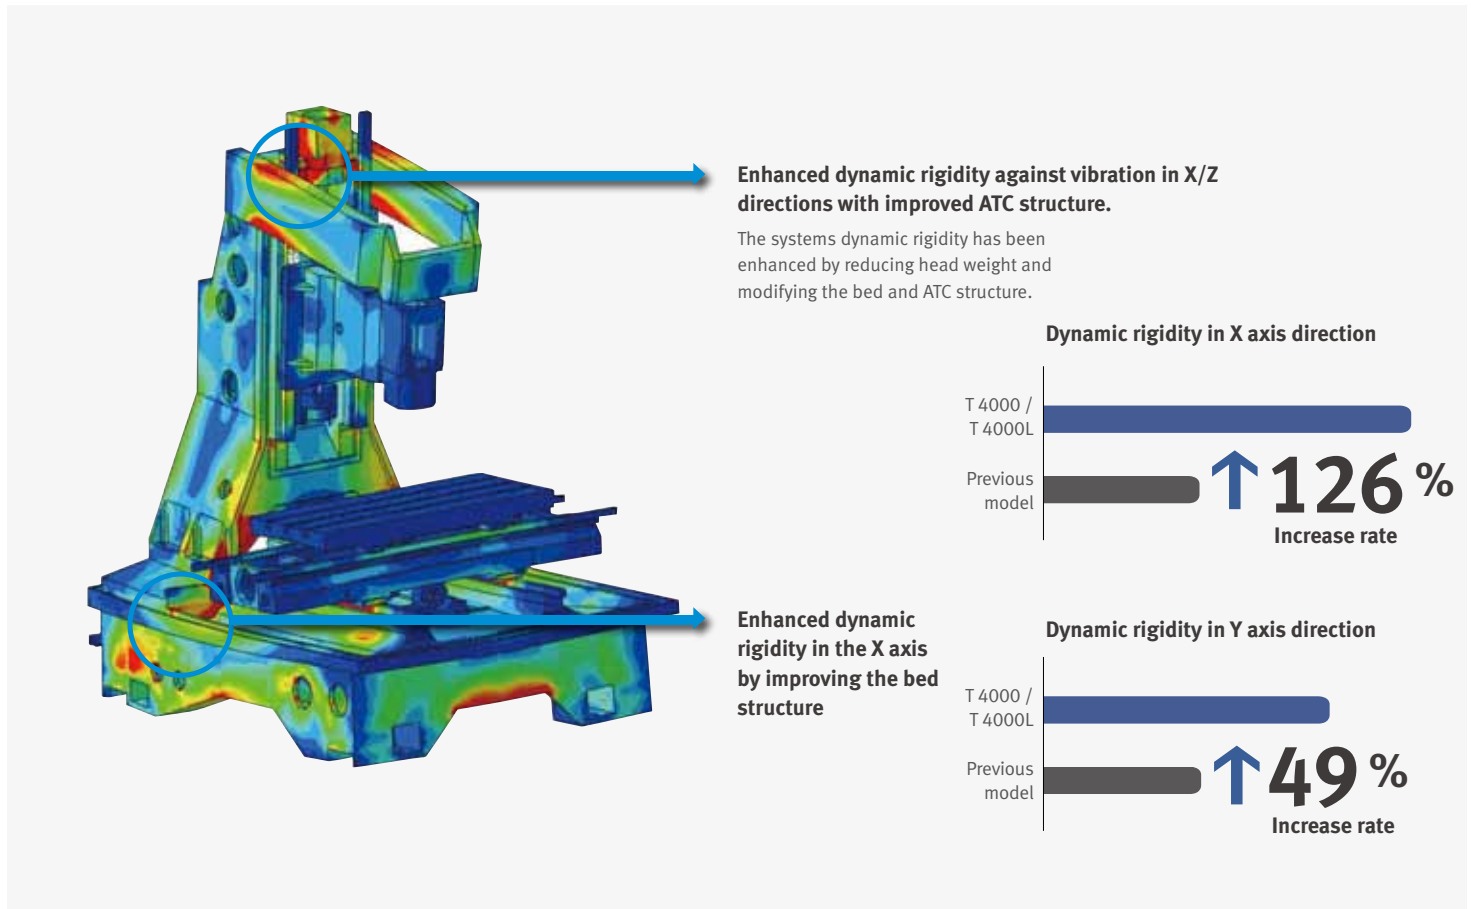

### Optimal Design for the User Environment

The machine's compact design delivers greater user convenience and requires minimal floor space.

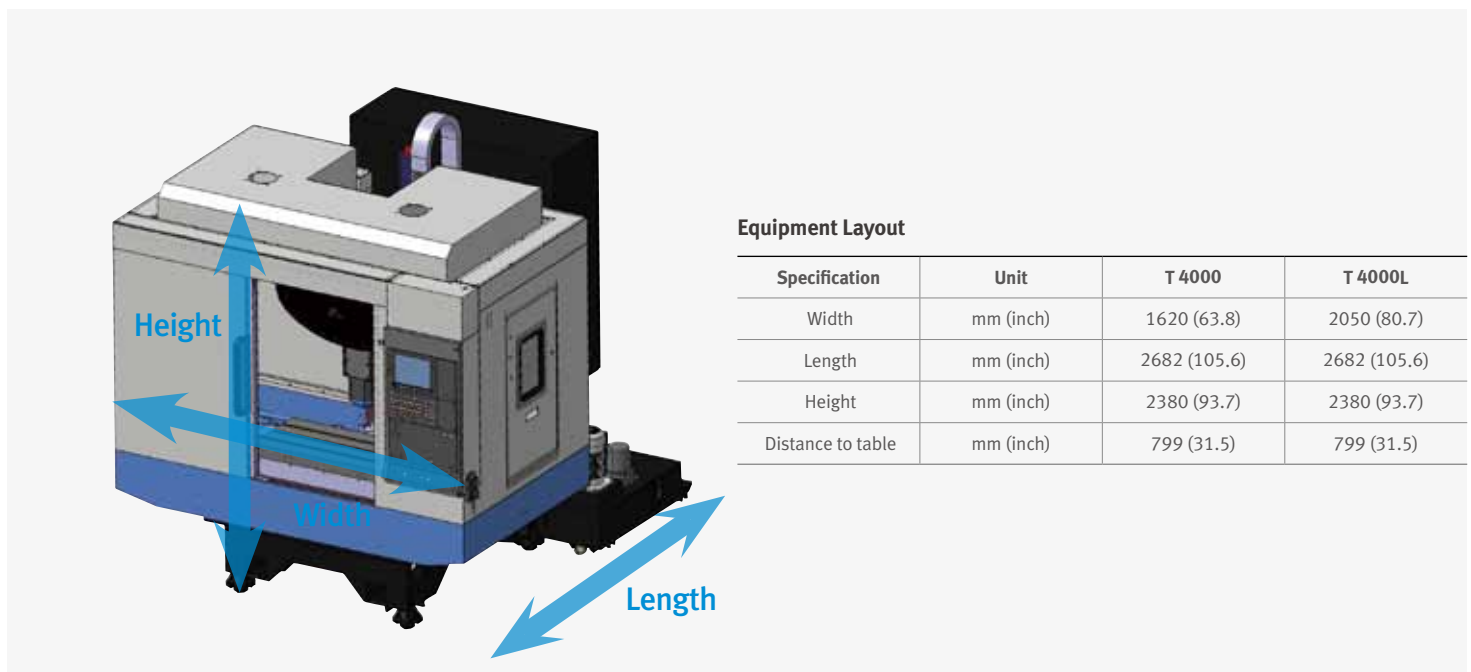



## Spindle & NC Unit Specifications

The newly designed, direct-coupled spindle offers greater productivity coupled with excellent reliability and rapid acceleration/ deceleration.


### New, High-Precision Spindle

The spindle length has been minimized to reduce the time required for acceleration/ deceleration and idle time, resulting in greater productivity and reduced vibration and noise.



### Spindle Thermal Error Compensation System (standard)

Thermal error of the spindle is calculated with the spindle temperature feedback and automatically compensated to maintain the highest level of work accuracy.

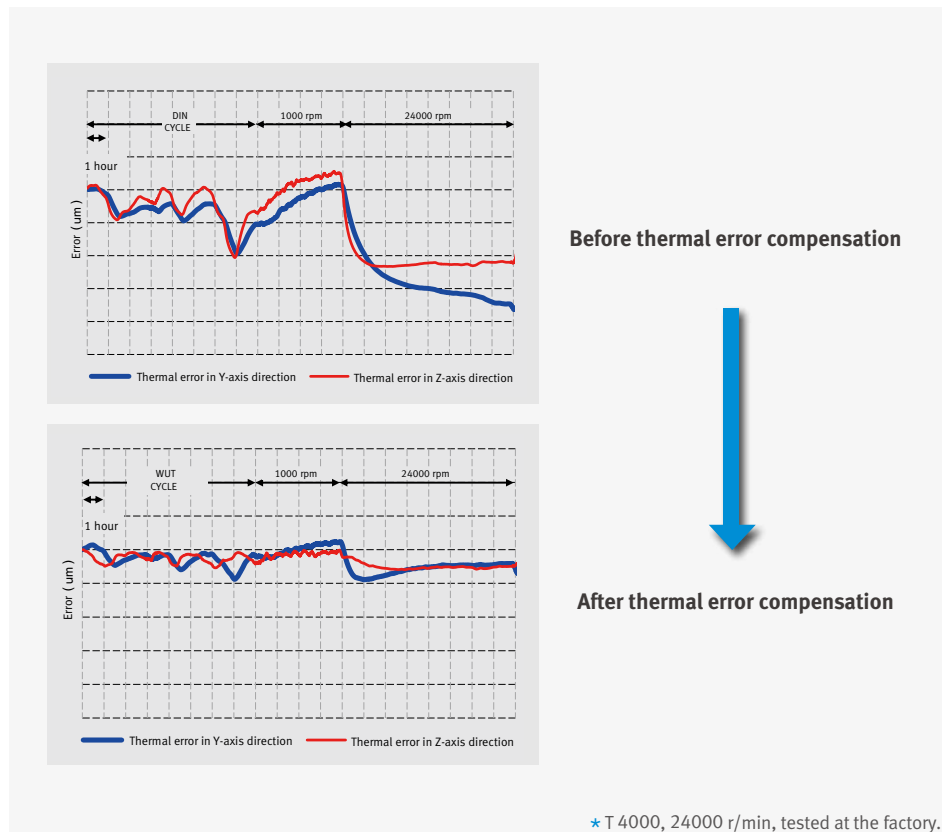

## DOOSAN-FANUC i series

Power and torque of the spindle motor have increased beyond the levels of previous models to deliver more powerful machining.


### Improved Spindle Motor Performance

| Spindle | Unit         | Previous model | T series  |
|---------|--------------|----------------|-----------|
| Power   | kW (Hp)      | 5.5 (7.4)      | 13 (17.4) |
| Torque  | N·m (ft·lbs) | 35 (25.8)      | 83 (61.3) |

### Maximize productivity

| Specification                     | Unit | Previous model | T series |
|-----------------------------------|------|----------------|----------|
| Spindle Acceleration/Deceleration | sec  | 1.04           | 0.67     |
| Tool-to-Tool                      | sec  | 1.48           | 1.36     |
| Chip-to-Chip                      | sec  | 2.4            | 1.8      |

### Cycle Time

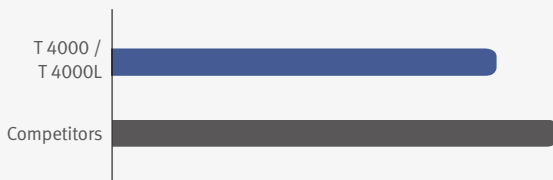

Cycle Time reduced by  
**17%**  
than competitors



IT parts

## FANUC 31i

The FANUC 31i is designed to satisfy users' demands for higher machining accuracy and ultra-fine cutting.

| Description    | Unit  | FANUC 31i |
|----------------|-------|-----------|
| Rapid traverse | m/min | 48        |

### Cycle Time



Cycle Time reduced by  
**15%**  
than previous models

Previous model



Fanuc 31i



Basic information

Basic Structure  
Cutting  
Performance

Detailed Information

Standard/Optional Specifications  
Applications  
Diagrams  
Machine & NC Unit Specifications

Customer Support Service

## Magazine

Machine reliability has been improved with the new servo magazine, while productivity has been enhanced by reducing the tool change time.

### Tool Magazine

The servo-motor driven position control system has passed the two-million-cycles test, proving its excellent reliability and durability.




Servo tool magazine


# 21 ea

| Specifications | Max. tool diameter (mm (inch)) |                     | Max. tool length (mm(inch)) | Max. tool weight (kg (lb)) |
|----------------|--------------------------------|---------------------|-----------------------------|----------------------------|
|                | Continuous                     | Adjacent pots empty |                             |                            |
| 21 tools       | 80 (3.1)                       | 150 (5.9)           | 240 (9.4)                   | 2.8 (6.2)                  |

The new T Series is equipped with a 21 tool servo-driven magazine, replacing the 14-tool magazine of previous models. The new drive system is enclosed for greater oil resistance.

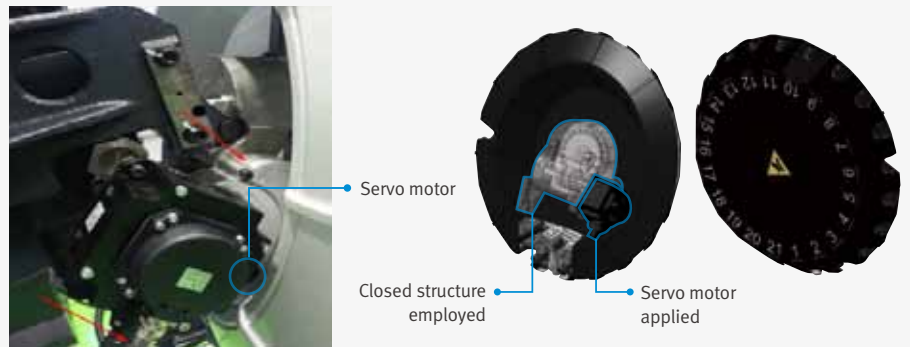

### Simultaneous operation control

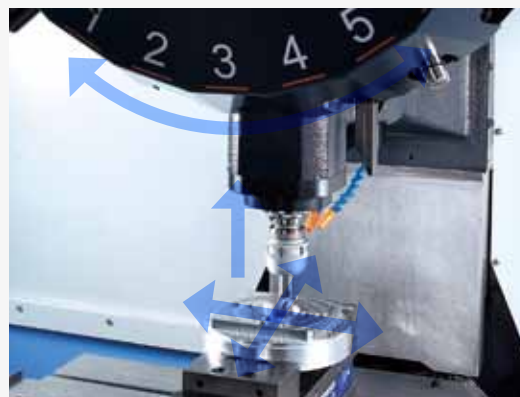

The T Series supports simultaneous X/Y-axis travel during tool change (G100, FANUC), and the axes can be positioned at the next cutting point to minimize idle time.





## Cutting Performance

Multi-functionality including end milling, face milling, drilling, tapping, etc., enhanced machining performance and minimized work setting.

## Powerful Cutting

| Tap   |                          |                          |   | Face mill (Ø63 mm (2.5 inch) Face mill) |                                  |                                 |                                  |
|---|--------------------------|--------------------------|---|---|----------------------------------|---------------------------------|----------------------------------|
|   |                          |                          |   |   |                                  |                                 |                                  |
| Tool Diameter (mm (inch)) X Pitch (mm (inch)) |                          |                          | Chip Removal Rate (cm <sup>3</sup> /min) X Spindle Speed (r/min)<br>X Feedrate (mm/min) X Cutting Depth (mm (inch)) |   |                                  |                                 |                                  |
|   | SM45C                    | GC25                     | AL6061  | SM45C                                   | GC25                             | AL6061                          |                                  |
| DOOSAN FANUC i series<br>(12000 r/min)        | M20 (0.8) X 2.5<br>(0.1) | M24 (0.9) X 3.0<br>(0.1) | M30 (1.2) X 3.5<br>(0.1)  | DOOSAN FANUC i series<br>(12000 r/min)  | 208 X 1500 X<br>2600 X 2.0 (0.1) | 320 X 1500 X<br>4000 X 2.0(0.1) | 684 X 1500 X<br>5700 X 3.0 (0.1) |

\* The results, indicated in this catalogue are provides as example. They may not be obtained due to differences in cutting conditions and environmental conditions during measurement.

## Spindle Power – Torque Diagram

| DOOSAN Fanuc i series   |  | Fanuc 31i DOOSAN FANUC i series <span style="background-color: #0056b3; color: white; padding: 2px;">option</span> |  | Fanuc 31i <span style="background-color: #0056b3; color: white; padding: 2px;">option</span>                |  |
|---|--|--|--|---|--|
| Max. spindle speed : 12000 r/min<br>Spindle Motor : 13 / 7.5 / 5.5 / 3.7 kW<br>(17.4 / 10.1 / 7.4 / 5.0 Hp) |  | Max. spindle speed : 24000 r/min<br>Spindle Motor : 3.7 / 2.2 / 1.1 kW<br>(5.0 / 3.0 / 1.5 Hp)                     |  | Max. spindle speed : 12000 r/min<br>Spindle Motor : 11 / 7.5 / 5.5 / 3.7 kW<br>(14.8 / 10.1 / 7.4 / 5.0 Hp) |  |
|   |  |  |  |   |  |

Product Overview

Basic information

Basic Structure  
Cutting  
Performance

Detailed Information

Standard/Optional Specifications  
Applications  
Diagrams  
Machine & NC Unit Specifications

Customer Support Service



Standard/Optional Specifications

Diverse optional devices and features available to meet specific customer requirements.


● Standard ○ Optional X N/A

| NO. | Description                       | Features                      | F-0i | F-31i |
|-----|-----------------------------------|-------------------------------|------|-------|
| 1   | Spindle                           | 12000 r/min                   | ●    | ○     |
| 2   |                                   | 24000 r/min                   | ○    | ●     |
| 3   | Spindle motor power               | 12000_5.5/3.7 kW (7.4/5.0 Hp) | ●    | ○     |
| 4   |                                   | 12000_15/5.5 kW (20.1/7.4 Hp) | X    | X     |
| 5   |                                   | 24000_3.7/1.1 kW (5.0/1.5 Hp) | ○    | ●     |
| 6   | TSC                               | NONE                          | ●    | ●     |
| 7   |                                   | 1.5 kW (2.0 Hp)_2.0 MPa       | ○    | ○     |
| 8   | LCD size                          | 8.4 inches                    | ●    | X     |
| 9   |                                   | 10.4 inches                   | ○    | ●     |
| 10  |                                   | 12.1 inches                   | X    | X     |
| 11  | Tool shank type                   | BIG PLUS BT30                 | ●    | ●     |
| 12  |                                   | HSK 63A                       | X    | X     |
| 13  | Tool magazine                     | 21 tools                      | ●    | ●     |
| 14  | Raised column                     | 150mm (5.9 inch)              | ○    | ○     |
| 15  | Hydraulic fixture interface       | A/B LINE_1 PAIR               | ○    | ○     |
| 16  |                                   | A/B LINE_2 PAIR               | ○    | ○     |
| 17  | Coolant                           | FLOOD (0.15 MPA)              | ●    | ●     |
| 18  |                                   | Flushing                      | ●    | ●     |
| 19  |                                   | Shower                        | ○    | ○     |
| 20  |                                   | Coolant gun                   | ○    | ○     |
| 21  | OIL SKIMMER                       | Belt type                     | ○    | ○     |
| 22  | AIR                               | Air blower                    | ○    | ○     |
| 23  |                                   | Air gun                       | ○    | ○     |
| 24  |                                   | Spindle air curtain           | ●    | ●     |
| 25  | Chip Conveyor                     | Chip pan                      | ●    | ●     |
| 26  |                                   | Hinged type                   | ○    | ○     |
| 27  |                                   | Magnetic scrapper type        | ○    | ○     |
| 28  | Chip bucket                       | Forklift or rotation          | ○    | ○     |
| 29  | Automatic front door              | Automatic front door          | ○    | ○     |
| 30  | Mist collector                    |                               | ○    | ○     |
| 31  | Machine cover type                | Top cover                     | ●    | ●     |
| 32  | Auto tool length measuring device | TS27R_RENISHAW                | ○    | ○     |
| 33  | Auto tool damage detection device | Needle swing type             | ○    | ○     |
| 34  |                                   | Omron limit switch type       | ○    | ○     |
| 35  | Data server                       | DATA SERVER_1GB               | ○    | ○     |
| 36  | Auto power cut-off                |                               | ○    | ○     |
| 37  | Test bar                          | Test bar gauge                | ○    | ○     |
| 38  | Signal tower                      | System condition indicator    | ●    | ●     |

Diverse Options

4-axis Auxiliary device Interface/Hydraulic & Pneumatic Jig Line

- 4-axis Auxiliary device Interface
- Hydraulic/pneumatic jig line

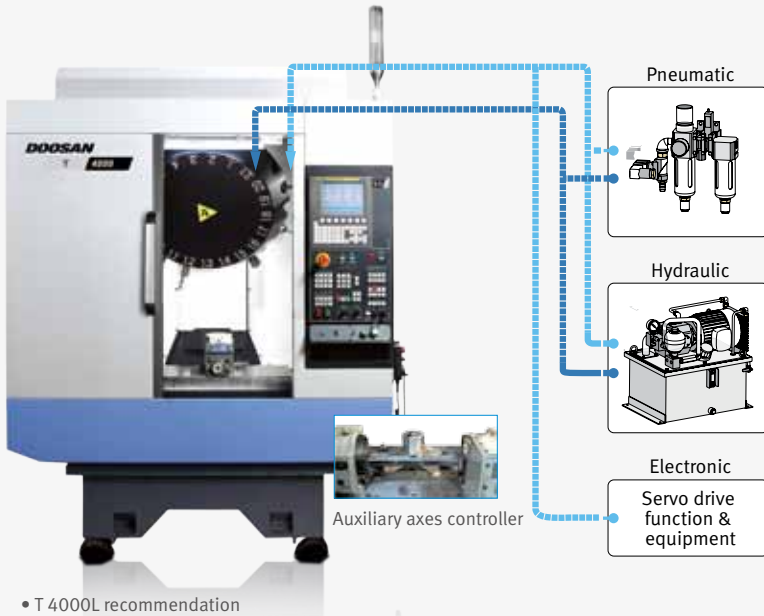


Checklist for hydraulic/pneumatic lines for work clamping

- Hydraulic/pneumatic line for jig
- Hydraulic line  P/T  A/B
- Pneumatic line  P/T  A/B

- Hydraulic unit
- Supplier :  End user  Doosan Infracore

- Hydraulic unit  
24 L/min / 4.4 MPA
- Customer requirements  
\_\_\_\_\_ L/min at \_\_\_\_\_ MPA

- Number of jig ports
- 1 pair (2-PT 1/4" port)
  - 2 pair (4-PT 3/8" port)
  - 3 pair (6-PT 1/4" port)

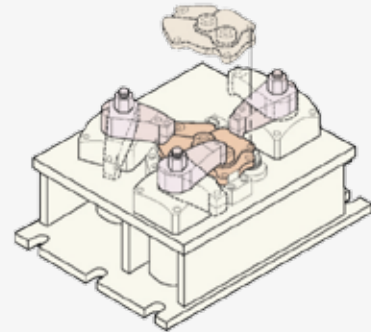

• Please contact us for further detailed specifications.



Through-spindle coolant system



Raised column(150mm)



Auto Door



Chip Conveyor




Minimum Quantity Lubrication



Oil Skimmer



Chip box for fine chip disposal



Auto Tool Measurement Device





Basic information

- Basic Structure
- Cutting
- Performance

Detailed Information

- Standard/Optional Specifications
- Applications
- Diagrams
- Machine & NC Unit Specifications

Customer Support Service




User-Friendly Operation Panel

The operation panels are integrated, and customer-tailored function switches ensure convenient system operation.

Clamping device lock/unlock button, counter, timer and other special optional buttons are also available.

Buttons are separated by partitions to prevent erroneous operation.



Convenience Functions (Hot Keys)

Frequently used functions can be accessed and used quickly and easily by clicking the hot key buttons.

- 1 Tapping retract function: A function readily releases tool by reverse rotating the spindle in manual mode when the tool is caught due to a power failure, emergency stop or NC reset.
- 2 One-touch zero return function: Pressing in manual mode returns the z axis to the primary zero point.
- 3 ATC position return function: Pressing in manual mode returns the z axis to the secondary zero point, enabling tool magazine rotation.
- 4 Tool change function: Load and auto-exchange an adjacent tool [Current Tool No. +1] in manual mode.

PCMCIA Card

The PCMCIA card enables uploading and downloading of the NC program, NC parameters, tool information, ladder programs, and also supports DNC operation.

USB Port

The USB memory stick enables uploading and downloading of the NC program, NC parameters, tool information and ladder programs. (DNC operation is not supported.)



Convenient Fanuc Control

Variable workload control

Instructing M-code equivalent to the weight of the work automatically selects a table transfer pattern appropriate for the weight to be processed.

FANUC

|         | M-code          | M384       | M380         | M381         |
|---------|-----------------|------------|--------------|--------------|
| T 4000  | Material weight | 0 ~ 130 kg | 130 ~ 190 kg | 190 ~ 300 kg |
| T 4000L | Material weight | 0 ~ 130 kg | 130 ~ 190 kg | 190 ~ 300 kg |

AICC

Higher cutting and feed spindle can be accompanied with unwanted machining error due to high acceleration and deceleration. This function serves to minimize contour deviation of work by controlling servo motor based on block ahead-reading.

DOOSAN Fanuc i series :

AIAPC 20 Block

AICC 40 Block option AICC II 200 Block option

Fanuc 31i :

AICC II 200 Block


AICC II 600 Block option AICC II 1000 Block option

## Dimensions


### T 4000

Unit : mm (inch)

Top View

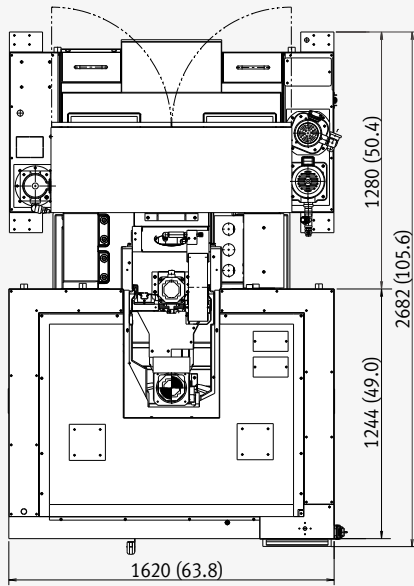


Front View

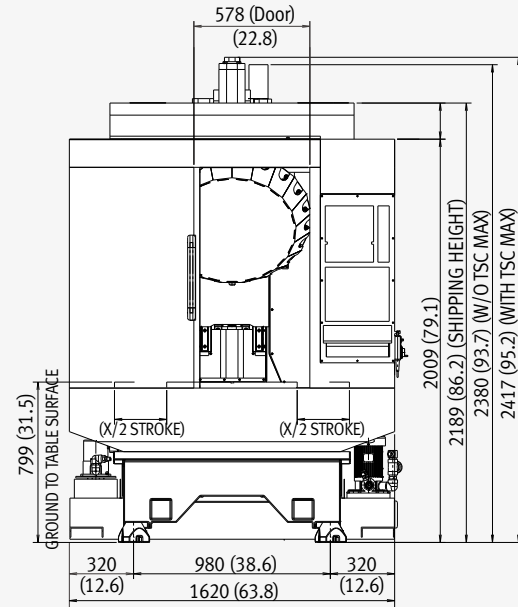


### T 4000L

Unit : mm (inch)

Top View

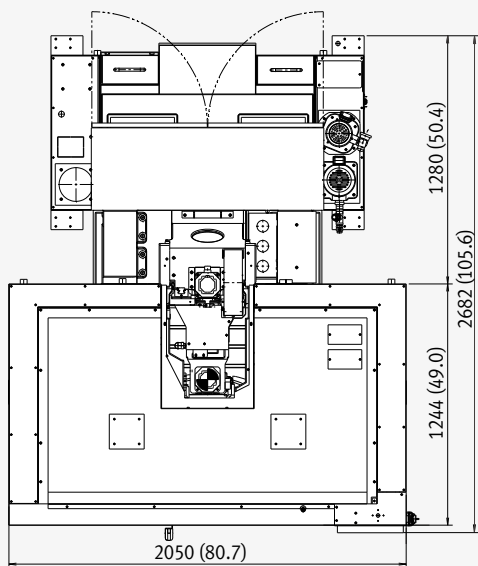

Front View

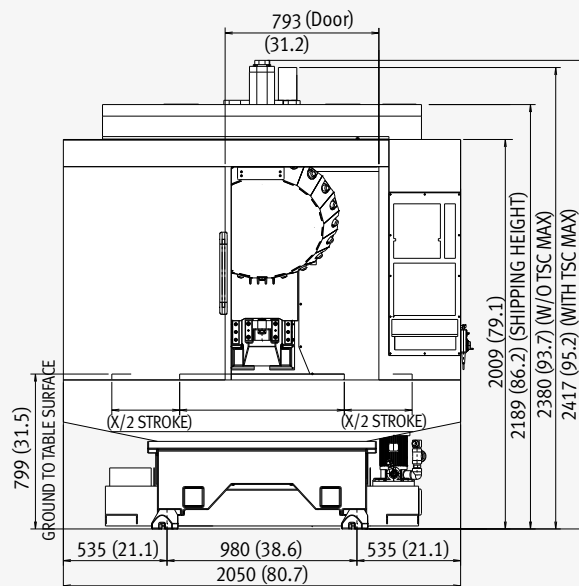




## Table

### Basic information

Basic Structure  
Cutting  
Performance

## T 4000

Unit : mm (inch)

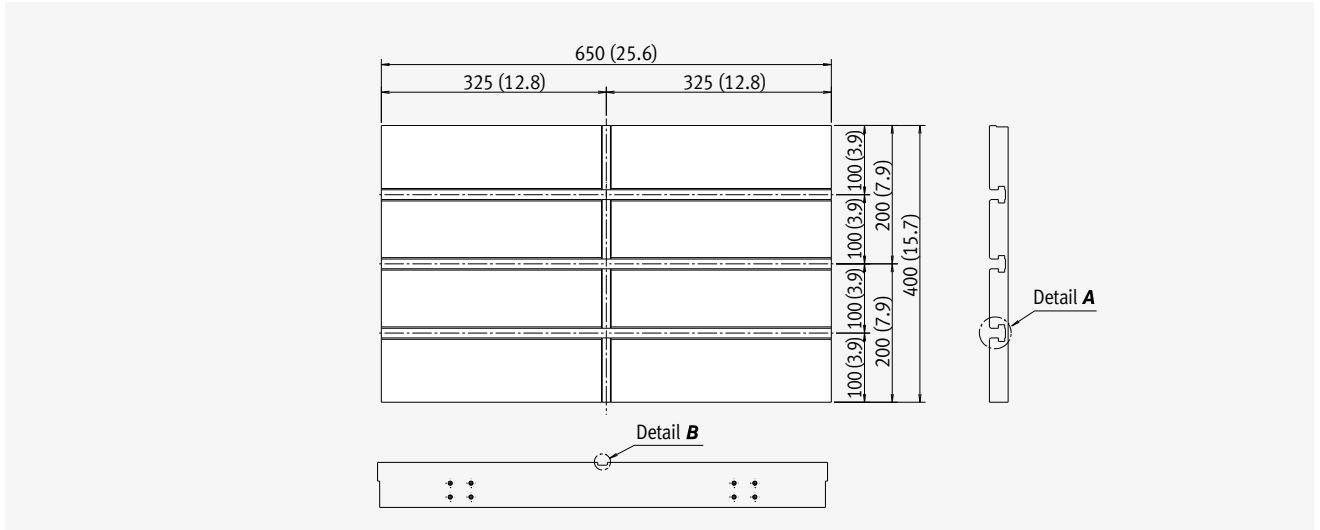


### Detailed Information

Standard/Optional Specifications  
Applications  
Diagrams  
Machine & NC Unit Specifications

### Customer Support Service


## T 4000L

Unit : mm (inch)

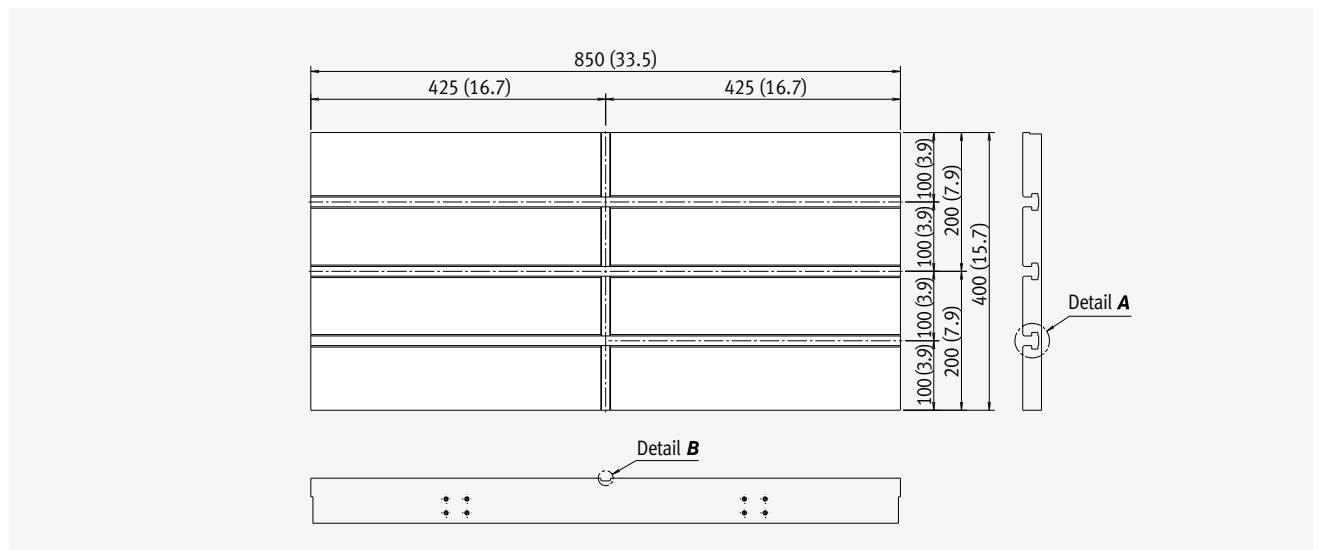

## T-slot Specification / Tool Specification

Unit : mm (inch)

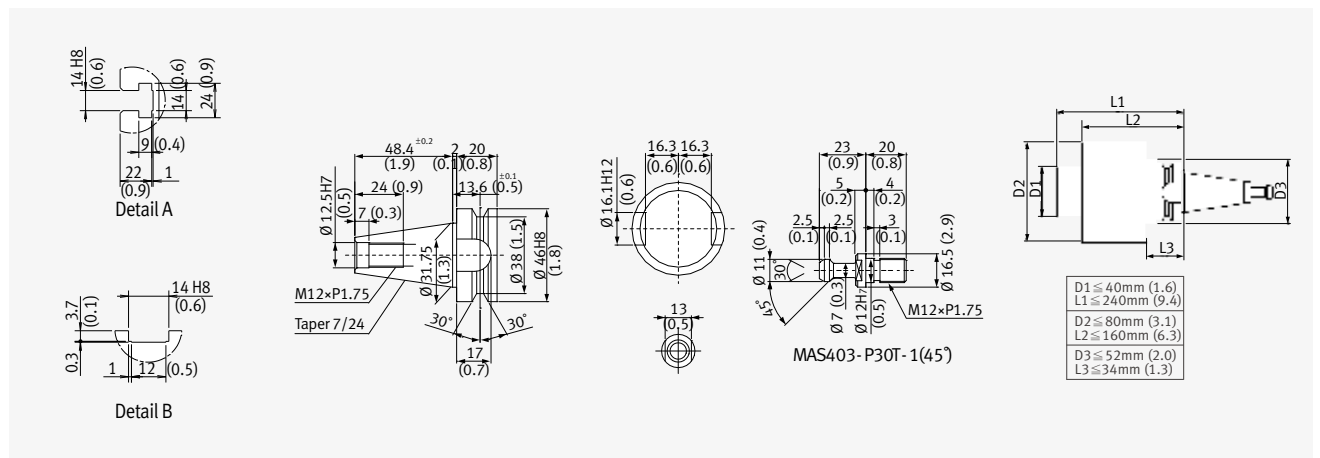

## Machine Specifications



| Specification                   |   |                 | Unit          | T 4000   |   | T 4000L   |  |
|---------------------------------|---|-----------------|---------------|--|---|---|--|
|                                 |   |                 |               | F-0i   | F-0i  | F-31i   |  |
| Travel                          | Travel distance                           | X-axis          | mm (inch)     | 520 (20.5)   | 700 (27.6)  |   |  |
|                                 |   | Y-axis          | mm (inch)     | 400 (15.7)   |   |   |  |
|                                 |   | Z-axis          | mm (inch)     | 350 (13.8)   |   |   |  |
|                                 | Distance from spindle center to table top |                 | mm (inch)     | 150 ~ 500 (5.9 ~ 19.7)   |   |   |  |
|                                 | Distance from spindle center to column    |                 | mm (inch)     | 443 (17.4)   |   |   |  |
| Feed rate                       | Rapid Transfer Rate                       | X-axis          | m/min         | 56   | 56  | 48  |  |
|                                 |   | Y-axis          | m/min         | 56   | 56  | 48  |  |
|                                 |   | Z-axis          | m/min         | 56   | 56  | 48  |  |
|                                 | Max. cutting feedrate                     |                 | m/min         | 28   | 28  | 24  |  |
| Table                           | Table size                                |                 | mm (inch)     | 650 X 400 (25.6 X 15.7)  | 850 X 400 (33.5 X 15.7)   |   |  |
|                                 | Loading capacity                          |                 | kg (lb)       | 300 (661.4)  |   |   |  |
|                                 | Table type                                |                 |               | T-SLOT (3-100 X 14H8)  |   |   |  |
| Spindle                         | Max. Spindle Speed                        |                 | r/min         | 12000 {24000}  | 12000   | 24000 {12000}   |  |
|                                 | Spindle taper                             |                 |               | ISO #30, 7/24 TAPER  |   |   |  |
|                                 | Max. spindle torque                       |                 | N-m (ft.-lbs) | 82.7 (182.3) (S3 15%) {11.8 (26.0) (5 min)}  | 82.7 (182.3) (S3 15%)   | 11.8 (26.0) (5 min) {70 (154.3) (S3 15%)}   |  |
| ATC                             | Tool shank type                           |                 |               | MAS403 BT 30 / MAS403 P30T-1 45deg   |   |   |  |
|                                 | Tool storage capacity                     |                 | ea            | 21   |   |   |  |
|                                 | Max. tool diameter                        | Continuous      | mm (inch)     | 80 (3.1)   |   |   |  |
|                                 |   | Near port empty | mm (inch)     | 150 (5.9)  |   |   |  |
|                                 | Max. tool length                          |                 | mm (inch)     | 240 (9.4) (Tool diameter ≤ 40 (1.6))   |   |   |  |
|                                 | Max. tool weight                          |                 | kg (lb)       | 2.8 (6.2)  |   |   |  |
|                                 | Max. tool weight                          |                 | kg (lb)       | 33 (72.8)  |   |   |  |
|                                 | Max. magazine eccentric load weight       |                 | kg (lb)       | 21 (46.3)  |   |   |  |
|                                 | Tool selection                            |                 |               | FIXED ADDRESS  |   |   |  |
|                                 | Tool change time (tool to tool)           |                 | s             | 1.3  | 1.3   |   |  |
| Tool change time (chip-to-chip) |   | s               | 1.8           | 1.8*   |   |   |  |
| Motor                           | Spindle motor power                       |                 | kW (Hp)       | 13 (17.4) (S3 15%) / 7.5 (10.1) (S3 25%) / 5.5 (7.4) (30 min) / 3.7 (5.0) (Cont.) {3.7 (5.0) (5 min) / 2.2 (3.0) (10 min) / 1.1 (1.5) (Cont.)} | 13 (17.4) (S3 15%) / 7.5 (10.1) (S3 25%) / 5.5 (7.4) (30min.) / 3.7 (5.0) (Cont.) | 3.7 (5.0) (5 min) / 2.2 (3.0) (10 min) / 1.1 (Cont.) {11 (1.5) (S3 15%) / 7.5 (10.1) (S3 25%) / 5.5 (7.4) (30 min) / 3.7 (5.0) (Cont.)} |  |
|                                 | Coolant pump motor power                  |                 | kW (Hp)       | FLOOD : 0.4 (0.5) BASE COOLANT : 0.9 (1.2)   |   |   |  |
| Power Source                    | Electric power                            |                 | kVA           | 19 {15.7}  | 19  | 17.5 {20.8}   |  |
|                                 | Power Source                              |                 | Mpa           | 0.54   |   |   |  |
| Dimensions                      | Height                                    |                 | mm (inch)     | 2380 (93.7)  |   |   |  |
|                                 | Length                                    |                 | mm (inch)     | 2682 (105.6)   |   |   |  |
|                                 | Width                                     |                 | mm (inch)     | 1620 (63.8)  | 2050 (80.7)   |   |  |
|                                 | Weight                                    |                 | kg (lb)       | 2400 (5291.0)  | 2500 (5511.5)   |   |  |

{ } : Optional \* G 100 function applied

# NC Unit Specifications

● Standard ○ Optional ✕ Not applicable



**Basic information**

- Basic Structure
- Cutting
- Performance

**Detailed Information**

- Standard/Optional Specifications
- Applications
- Diagrams
- Machine & NC Unit Specifications

**Customer Support Service**

| Item                             | Spec.   | T 4000 / L   |         |         |
|----------------------------------|---|--|---------|---------|
|                                  |   | F-0i   | F-31i   |         |
| Control Axes                     | Controlled axes   | 3 (X, Y, Z)  | X, Y, Z | X, Y, Z |
|                                  | Additional controlled axes  | 5 axes in total  | ○       | ○       |
|                                  | Least command increment   | 0.001 mm / 0.0001"   | ●       | ●       |
|                                  | Least input increment   | 0.001 mm / 0.0001"   | ●       | ●       |
|                                  | Interpolation type pitch error compensation   |  | -       | ○       |
| Interpolation & Feed Function    | 2nd reference point return  | G30  | ●       | ●       |
|                                  | 3rd / 4th reference return  |  | ●       | ○       |
|                                  | Inverse time feed   |  | ●       | ○       |
|                                  | Cylindrical interpolation   | G07.1  | ●       | ○       |
|                                  | Helical interpolation B   | Only Fanuc 30i   | -       | -       |
|                                  | Smooth interpolation  |  | -       | ○       |
|                                  | NURBS interpolation   |  | -       | ○       |
|                                  | Involute interpolation  |  | -       | ○       |
|                                  | Helical involute interpolation  |  | -       | ○       |
|                                  | Bell-type acceleration/deceleration before look ahead interpolation                                       |  | ○       | ○       |
|                                  | Smooth backlash compensation  |  | ○       | ●       |
|                                  | Automatic corner override   | G62  | ●       | ○       |
|                                  | Manual handle feed  | Max. 3unit   | 1 unit  | 1 unit  |
|                                  | Manual handle feed rate   | x1, x10, x100 (per pulse)  | ●       | ●       |
|                                  | Handle interruption   |  | ●       | ○       |
|                                  | Manual handle retrace   |  | ○       | ○       |
|                                  | Manual handle feed 2/3 unit   |  | -       | ○       |
|                                  | Nano smoothing  | AI contour control II is required.   | ○       | ○       |
|                                  | AI APC  | 20 BLOCK   | ●       | ✕       |
|                                  | AICC I  | 30 BLOCK   | -       | ✕       |
|                                  | AICC I  | 40 BLOCK   | ○       | -       |
|                                  | AICC II   | 200 BLOCK  | ○       | ●       |
|                                  | AICC II   | 400 BLOCK  | -       | ○       |
|                                  | High-speed processing   | 600 BLOCK  | -       | ○       |
|                                  | Look-ahead blocks expansion   | 1000 BLOCK   | -       | ○       |
|                                  | DSQ I   | AICC II (200block) + Machining condition selection function                    | -       | -       |
|                                  | DSQ II  | AICC II (200block) + Machining condition selection function + Data server(1GB) | -       | -       |
| DSQ III                          | AICC II with high speed processing (600block) + Machining condition selection function + Data server(1GB) | -  | -       |         |
| Spindle & M-code Functions       | M- code function  |  | ●       | ●       |
|                                  | Retraction for rigid tapping  |  | ●       | ●       |
|                                  | Rigid tapping   | G84, G74   | ●       | ●       |
| Tool Function                    | Number of tool offsets  | 64 ea  | -       | 64 ea   |
|                                  | Number of tool offsets  | 99 ea  | -       | ○       |
|                                  | Number of tool offsets  | 200 ea   | -       | ○       |
|                                  | Number of tool offsets  | 400 ea   | 400 ea  | ○       |
|                                  | Number of tool offsets  | 499 / 999 / 2000 ea  | -       | ○       |
|                                  | Tool nose radius compensation   | G40, G41, G42  | ●       | ●       |
|                                  | Tool length compensation  | G43, G44, G49  | ●       | ●       |
|                                  | Tool life management  |  | ●       | ●       |
|                                  | Addition of tool pairs for tool life management   |  | ●       | ○       |
|                                  | Tool offset   | G45 - G48  | ●       | ○       |
| Programming and Editing Function | Custom macro  |  | ●       | ●       |
|                                  | Macro executor  |  | ○       | ○       |
|                                  | Extended part program editing   |  | ●       | ●       |
|                                  | Part program storage  | 256KB(640m)  | -       | 640m    |
|                                  | Part program storage  | 512KB(1,280m)  | 1280m   | ○       |

| Item   | Spec.  | T 4000 / L   |          |          |
|--|--|--|----------|----------|
|  |  | F-0i   | F-31i    |          |
| Programming and Editing Function                     | Part program storage                               | 1MB(2,560m)  | -        | ○        |
|  | Part program storage                               | 2MB(5,120m)  | ○        | ○        |
|  | Part program storage                               | 4MB(1,0240m)   | -        | ○        |
|  | Part program storage                               | 8MB(2,0480m)   | -        | ○        |
|  | Inch/metric conversion                             | G20 / G21  | ●        | ●        |
|  | Number of Registered programs                      | 400 ea   | 400 ea   | -        |
|  | Number of Registered programs                      | 500 ea   | -        | 500 ea   |
|  | Number of Registered programs                      | 1000 ea  | -        | ○        |
|  | Number of Registered programs                      | 4000 ea  | -        | ○        |
|  | Optional block skip                                | 9 BLOCK  | ●        | ○        |
|  | Optional stop                                      | M01  | ●        | ●        |
|  | Program file name                                  | 32 characters  | -        | ●        |
|  | Program number                                     | 04-digits  | ●        | -        |
|  | Playback function                                  |  | ●        | ○        |
|  | Addition of workpiece coordinate system            | G54.1 P1 - 48 (48 pairs)   | 48 pairs | 48 pairs |
|  | Addition of workpiece coordinate system            | G54.1 P1 - 300 (300 pairs)   | -        | ○        |
| OTHERS FUNCTIONS (Operation, setting & Display, etc) | Embedded Ethernet                                  |  | ●        | ●        |
|  | Graphic display                                    | Tool path drawing  | ●        | ●        |
|  | Loadmeter display                                  |  | ●        | ●        |
|  | Memory card interface                              |  | ●        | ●        |
|  | USB memory interface                               | Only Data Read & Write   | ●        | ●        |
|  | Operation history display                          |  | ●        | ●        |
|  | DNC operation with memory card                     |  | ●        | ●        |
|  | Optional angle chamfering / corner R               |  | ●        | ●        |
|  | Run hour and part number display                   |  | ●        | ●        |
|  | High speed skip function                           |  | ●        | ○        |
|  | Polar coordinate command                           | G15 / G16  | ●        | ○        |
|  | Polar coordinate interpolation                     | G12.1 / G13.1  | -        | ○        |
|  | Programmable mirror image                          | G50.1 / G51.1  | ●        | ○        |
|  | Scaling  | G50, G51   | ●        | ○        |
|  | Single direction positioning                       | G60  | ●        | ○        |
|  | Pattern data input                                 |  | ●        | ○        |
|  | Jerk control                                       | AI contour control II is required.   | ○        | ○        |
|  | Fast Data server with 1GB PCMCIA card              |  | ○        | ○        |
|  | Fast Ethernet                                      |  | ○        | ○        |
|  | 3-dimensional coordinate conversion                |  | -        | ○        |
|  | 3-dimensional tool compensation                    |  | -        | ○        |
|  | Figure copying                                     | G72.1, G72.2   | -        | ○        |
|  | Machining time stamp function                      |  | -        | ○        |
|  | EZ Guide I with 10.4" Color TFT                    | Doosan infracore Conversational Programming Solution<br>-When the EZ Guide i is used, the Dynamic graphic display cannot application | ○        | ○        |
|  | Dynamic graphic display (with 10.4" Color TFT LCD) | Machining profile drawing.<br>-When the EZ Guide i is used, the Dynamic graphic display cannot application                           | ○        | ○        |

# Responding to Customers Anytime, Anywhere


Basic information

- Basic Structure
- Cutting
- Performance

Detailed Information

- Standard/Optional Specifications
- Applications
- Diagrams
- Machine & NC Unit Specifications

Customer Support Service

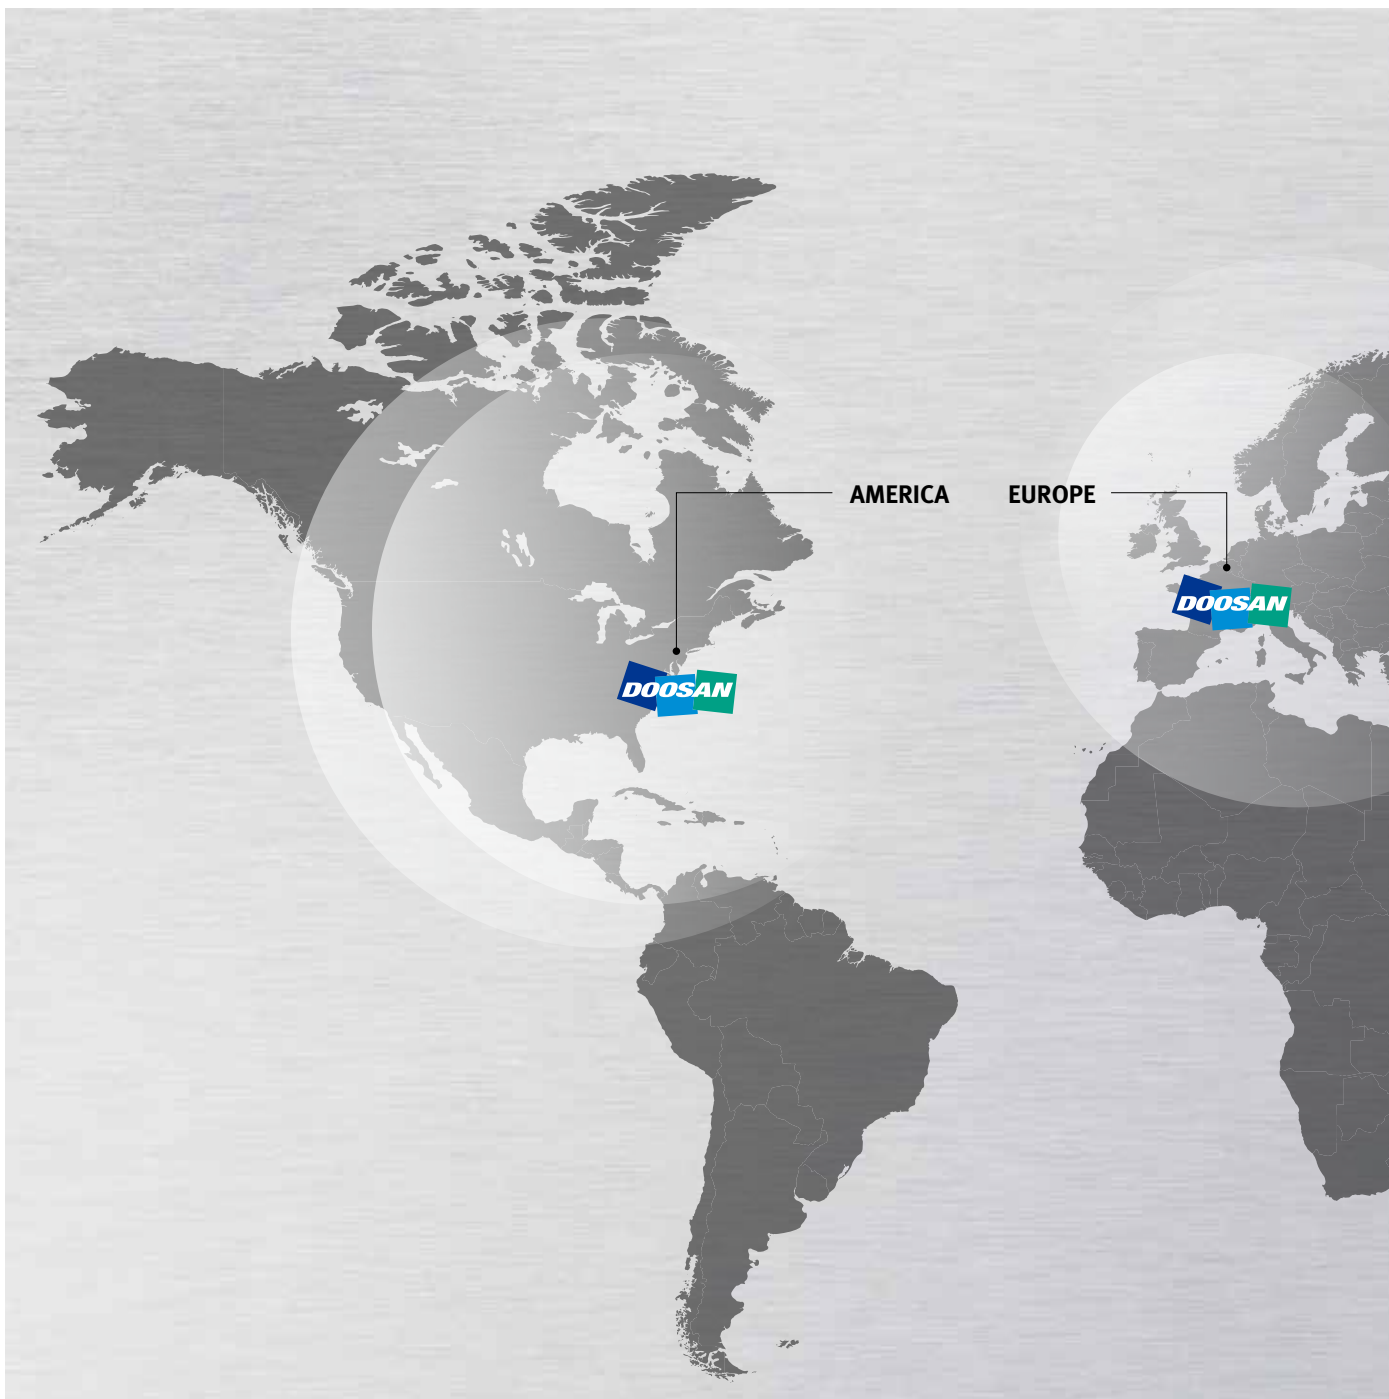

## Global Service Support Network

Corporations

5

Dealer Networks

122

Technical Centers

18

Factories

3

Technical Center: Sales Support, Service Support, Parts Support



## Doosan Machine Tools' Global Network, Responding to Customer's Needs nearby, Anytime, Anywhere

Doosan machine tools provides a system-based professional support service before and after the machine tool sale by responding quickly and efficiently to customers' demands. By supplying spare parts, product training, field service and technical support, we can provide top class support to our customers around the world.



### Customer Support Service

We help customers to achieve success by providing a variety of professional services from pre-sales consultancy to post-sales support.

### Supplying Parts



- Supplying a wide range of original Doosan spare parts
- Parts repair service

### Field Services



- On site service
- Machine installation and testing
- Scheduled preventive maintenance
- Machine repair

### Technical Support



- Supports machining methods and technology
- Responds to technical queries
- Provides technical consultancy

### Training



- Programming / machine setup and operation
- Electrical and mechanical maintenance
- Applications engineering

## Domestic Service Support Network

Integrated Support Centers

2

Sales Branch Offices

7

Post-Sales Service Centers

6

Designated Repair Service Centers

31

## Major Specifications

### T 4000 series



| Description                 | Unit      | T 4000                               | T 4000L                              |
|-----------------------------|-----------|--------------------------------------|--------------------------------------|
| Travel distance (X / Y / Z) | mm (inch) | 520 / 400 / 350 (20.5 / 15.7 / 13.8) | 700 / 400 / 350 (27.6 / 15.7 / 13.8) |
| Tool taper                  | taper     | 30                                   | 30                                   |
| Table size                  | mm (inch) | 650 x 400 (25.6x15.7)                | 850 x 400 (33.5x 15.7)               |
| Max. spindle speed          | kr/min    | 12000                                | 12000                                |
| Max. spindle motor power    | kW (Hp)   | 13 (17.4)                            | 13 (17.4)                            |
| Tool storage capacity       | ea        | 21                                   | 21                                   |
| NC system                   | -         | FANUC                                | FANUC                                |



**Doosan Machine Tools**

