


↑ 安装外形图
Overall dimension



型号	直伸出风口 smooth outlet	螺纹出口 threaded Outlet	A	H	H1	H2
AP200/300/400X/700X-V2	L L1 D L L1 D	L L1 D L L1 D	262	88.5	φ32	247
AP200/300-V1	L L1 D L L1 D	L L1 D L L1 D	234	88.5	φ32	219
AP400/700/900-V2	L L1 D L L1 D	L L1 D L L1 D	276	97	φ32	269
AP400/700/900-V1	L L1 D L L1 D	L L1 D L L1 D	249	97	φ32	242
AP200/300/400X/700X-V2	L L2 D L L2 D	L L2 D L L2 D	262	54	φ32	247
AP200/300-V1	L L2 D L L2 D	L L2 D L L2 D	234	54	φ32	219
AP400/700/900-V2	L L2 D L L2 D	L L2 D L L2 D	276	50.5	φ32	269
AP400/700/900-V1	L L2 D L L2 D	L L2 D L L2 D	249	50.5	φ32	242

注: 1. D 为中D 为螺纹连接方式时, 可配 φ32、φ33.5 接头。
2. 图中D 为直伸连接方式时, 可配 φ32、φ33.5 接管。
1. D in fig is thread connection that union of φ32 and φ33.5 available
2. D in fig is direct connection that only φ32 and φ33.5 available.

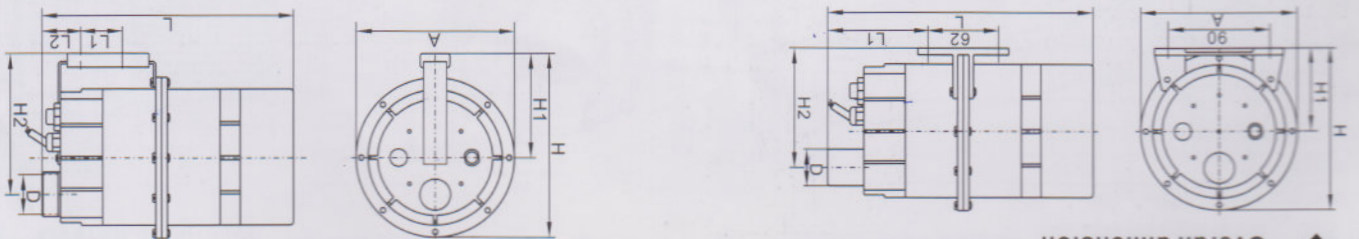

EN 60335-1: 2012+A11
EN 60335-2-60: 2003+A1+A2+A11+A12
EN 62233: 2008
EN 60335-2-30: 2009
EN 60335-2-35: 2002+A1+A2
EN60335-2-80: 2003+A1+A2

SAA

AS/NZS60335.1
AS/NZS60335.2.41

EN 60335-1: 2012+A11
EN 60335-2-60: 2003+A1+A2+A11+A12
EN 62233: 2008
EN 60335-2-30: 2009
EN 60335-2-35: 2002+A1+A2
EN60335-2-80: 2003+A1+A2



浴缸水循环
Recirculation of water in Bathtub pump



SPA池水循环
Recirculation of water in SPA equipment

工作条件

输送介质: 干燥空气

环境温度: <40℃

最大工作压力: 0.1MPa

Working conditions

Transmission Medium: Dry air

Environmental temperature: <40℃

Max working pressure: 0.1MPa

序号	名称	名称
1	十字盘头螺钉组合件 cross raised head screw assembling	电泵接头 Cable head
2	电泵接头 Cable head	接头组件 Union components
3	接头组件 Union components	上盖 Upper part of housing
4	上盖 Upper part of housing	O形圈 O-Ring
5	O形圈 O-Ring	上壳胶垫 On shell pads
6	上壳胶垫 On shell pads	熔断器 Fuse
7	熔断器 Fuse	电机 Motor
8	电机 Motor	下壳胶垫 Pad under the shell
9	下壳胶垫 Pad under the shell	下壳 Bottom part of housing
10	下壳 Bottom part of housing	六角螺母 Hexagonal Nut
11	六角螺母 Hexagonal Nut	进气过滤海绵 Air intake filter sponges
12	进气过滤海绵 Air intake filter sponges	气盖 Air cover
13	气盖 Air cover	十字盘头自攻螺钉 Cross raised pan head tapping screws
14	十字盘头自攻螺钉 Cross raised pan head tapping screws	


序号	名称	名称
15	提手 Handle	
16	防震胶垫 Shock pad	

型号	输入功率 Power (W)	电流 (Amps)	最大风压 Max Pressure (Mpa)	最大风量 Air volume (m³/min)	风泵噪音 Noise Level (dB(A))	可配气嘴数 Jets Qty	重量 (kg)	包装尺码 Packing size (mm)	装箱数量 (Qty/20')
AP200-V2	200	1.2	0.006	0.8	<63	6~12	2.0	290×155×175	3686
AP300-V2	300	3.0	1.7	1.2	<65	8~16	2.0	290×155×175	3686
AP400X-V2	400	2.5	0.014	1.5	<69	12~24	2.0	290×155×175	3686
AP700X-V2	700	7.0	0.022	1.85	<71	16~32	2.0	290×155×175	3686
AP400-V2	400	4.0	0.014	1.65	<68	12~24	2.8	300×190×215	2366
AP700-V2	700	7.0	0.018	2.0	<70	16~32	2.8	300×190×215	2366
AP900-V2	900	9.0	0.025	2.4	<74	20~40	2.8	300×190×215	2366
AP200-V1	200	2.0	0.008	1.1	<64	6~12	1.8	260×155×175	4112
AP300-V1	300	3.0	0.011	1.3	<66	8~16	1.8	260×155×175	4112
AP400-V1	400	4.0	0.015	1.7	<70	12~24	2.6	275×185×205	2780
AP700-V1	700	7.0	0.020	2.2	<72	16~32	2.6	275×185×205	2780
AP900-V1	900	9.0	0.025	2.4	<76	20~40	2.6	275×185×205	2780

↑ 技术参数列表
Technical parameter list

欧洲款
EUROPEAN TYPE

- 热保护器 Thermal protector
- 绝缘等级 Insulation
- 可选装空气开关 Optional air switch 15A/250V

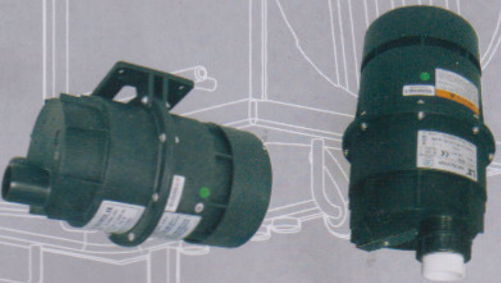

外形尺寸 Shape size (mm)