


DESCRIPTION	CHK'D	DATE

CUSTOMER	TYCO SPAIN
ORDER No.	63000942
TAG No.	ITEM No.

SON  
M09868  
LINE

LIST OF MATERIALS		REMA
No	DESCRIPTION	MATERIAL
1	B.	ASME SA216 WCB
2	NOZZLE	316 ST. STEEL
3	NOZZLE RING	316 ST. STEEL
4	SET SCREW	316 ST. STEEL
5A	DISC HOLDER	316L ST. STEEL
5B	BELLOWS	INCONEL 625
5C	TOP FLANGE	INCONEL 625
5E	BELLOWS TAILPIECE	316L ST. STEEL
5F	TAILPIECE GASKET	ORGANIC FIBRE
6	DISC INSERT	316 ST. STEEL
6A	RETENTION CLIP	INCONEL X750
8	GUIDE	ASTM A297 HE
9	SPINDLE	416 ST. STEEL
10	SPRING	CHROME STEEL
11	SPRING WASHER	CARBON STEEL
12	BONNET	ASME SA216 WCB
13	STUD	ASME SA 193 GR.B7
14	NUT	ASME SA 194 GR.2H
15	ADJUSTING BOLT	316 ST. STEEL
16	ADJUSTING BOLT NUT	316 ST. STEEL
20	GASKET (SET SCREW)	ORGANIC FIBRE
21	GASKET (GUIDE)	ORGANIC FIBRE
22	SEAL & WIRE	LEAD/ST. STEEL
24	CAP	CARBON STEEL
25	GASKET (CAP)	ORGANIC FIBRE
41	CAP BOLT	ASME SA193 GR.B7
42	NUT	ASME SA194 GR.2H

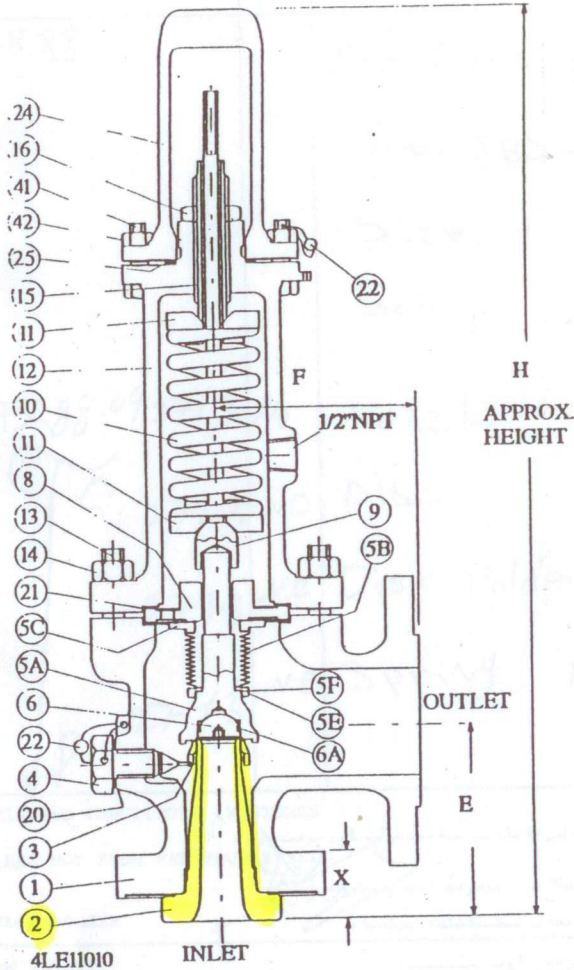

SYS

TAG No.S (CONTINUED)	ITEM No.	LINE
31-PSV-4340	32	32

RV/84/103

SIZE:	1" D 2"
STYLE:	JBS-E-35-L
INLET FACE FINISH:	63 - 125 AARH
OUTLET FACE FINISH:	63 - 125 AARH
1D/E3500JKLM	

INLET FLANGE	ANSI 16.5	OUTLET FLANGE	ANSI 16.5
	300LB		15'
	RF		RF

DIMENSIONS				TOLERANCES	
E*	F*	H	X**	APPROX. WEIGHT	
4.1/8"	4.1/2"	19.3/4"	1.9/16"		
105mm	114mm	502mm	40mm		

PREP'D BY	SB	CROSBY		CROSBY VALVE & ENG'G. LTD. MKT. HARBOROUGH, LEICS ENGLAND. LE14 9ER.	
CHK'D BY	5	DRAWING TITLE	NOZZLE TYPE RELIEF VALVE		
DATE	19.03.02	SHEET	1	OF	1
		DRG. No.	M09868CP3		REV
					O

DESCRIPTION

CHK'D

DATE

CUSTOMER:

TYCO SPAIN

SON

LIST OF MATERIALS

15010

ORDER No:

63000942

M09868

TAG No.

ITEM No.


LINE

31-PSV-2312

10

10

No	DESCRIPTION	MATERIAL	REMARKS
1	BODY	ASME SA216 WCB	
2	NOZZLE	316 ST. STEEL	
3	NOZZLE RING	316 ST. STEEL	
4	SET SCREW	316 ST. STEEL	
5A	DISC HOLDER	316L ST. STEEL	
5B	BELLOWS	INCONEL 625	
5C	TOP FLANGE	INCONEL 625	
5E	BELLOWS TAILPIECE	316L ST. STEEL	
5F	TAILPIECE GASKET	ORGANIC FIBRE	
6	DISC INSERT	316 ST. STEEL	
6A	RETENTION CLIP	INCONEL X750	
8	GUIDE	ASTM A297 HE	
9	SPINDLE	416 ST. STEEL	
10	SPRING	CHROME STEEL	CORR. RESIST. COATING
11	SPRING WASHER	CARBON STEEL	
12	BONNET	ASME SA216 WCB	
13	STUD	ASME SA 193 GR. B7	
14	NUT	ASME SA 194 GR. 2H	
15	ADJUSTING BOLT	316 ST. STEEL	
16	ADJUSTING BOLT NUT	316 ST. STEEL	
20	GASKET (SET SCREW)	ORGANIC FIBRE	
21	GASKET (GUIDE)	ORGANIC FIBRE	
22	SEAL & WIRE	LEAD/ST. STEEL	
24	CAP	CARBON STEEL	
25	GASKET (CAP)	ORGANIC FIBRE	
41	CAP BOLT	ASME SA193 GR. B7	
42	NUT	ASME SA194 GR. 2H	

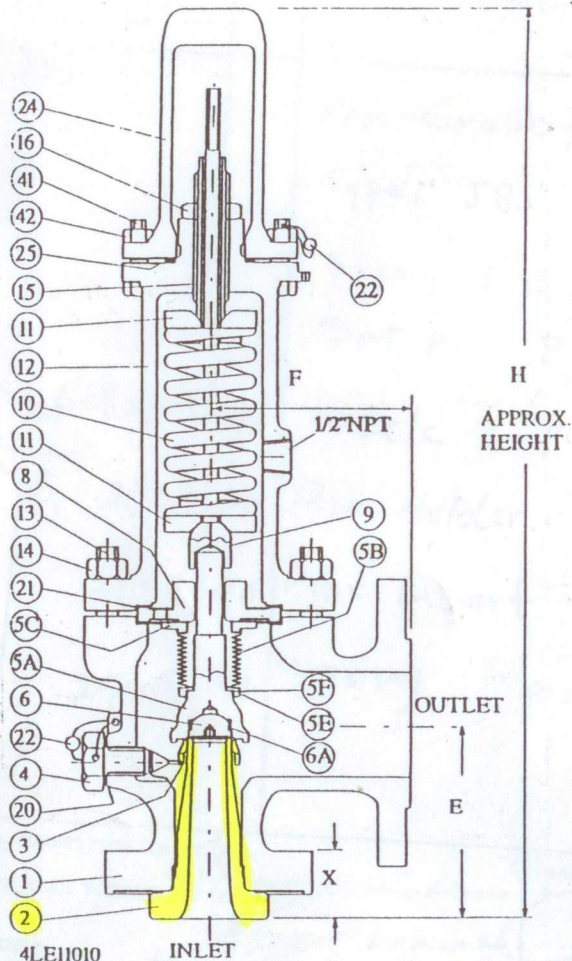

TAG No.S (CONTINUED)	ITEM No.	LINE

SYS

PS/84/104

SIZE:	1" E 2"	INLET FLANGE	OUTLET FLANGE	DIMENSIONS				TOLERANCES		PREP'D BY SB	CROSBY CROSBY VALVE & ENGG. LTD. WAT. HARBOROUGH, LEICS ENGLAND. LE14 7EE			
STYLE:	JBS-E-35-L	ANSI 16.5	ANSI 150	E*	F*	H	X**	APPROX. W <sub>0</sub>	+ 1/16" (1.6mm)	CHK'D BY S	DRAWING TITLE		NOZZLE TYPE RELIEF VALVE	
INLET FACE FINISH:	63 - 125 AARH	300LB	150	4.1/8"	4.1/2"	19.3/4"	1.9/16"	36	-1/16" (1.6mm)	DATE	SHEET	1	OF	1
OUTLET FACE FINISH:	63 - 125 AARH								** + 1/4" (6mm)					